



MODERN FUJI ELEVATOR

現代富士エレベーター株式会社
All customer-centric
Seeking increasing perfection
Struggle more than



SUZHOU MODERN FUJI ELEVATOR CO., LTD

現代富士エレベーター株式会社

Add: Lezhong Road, Economic Development Zone, Leyu Town, Zhangjiagang City, Jiangsu Province, China
Tel: 0086-512-58662668 Fax: 0086-512-58662682 Email: info@modernfuji.com Website: www.modernfuji.com

We have exported to some countries like Japan, USA, Canada, UAE, Saudi Arabia, etc.



MODERN FUJI COMPANY PROFILE



SOZHOU MODERN FUJI ELEVATOR CO.,LTD was established in 2009, which is a professional elevator research and development, manufacturing plant. It's a joint venture between 現代富士エレベーター株式会社 and China. 現代富士エレベーター株式会社 is located in Osaka, Japan, mainly for elevator research and development, and the joint venture's plant is located in Suzhou, China. The factory covers 25000 square meters, based on Japan's advanced technology, produces different kinds of high quality, high standard elevators, such as passenger elevator, panoramic elevator, cargo elevator, home elevator, hospital elevator, escalator and moving walks. The factory adheres to the concept that "Quality First and Constantly Strive for the Perfection", designs and produces customer's own elevator. Till now, MODERN FUJI elevators have been exported to a lot of overseas countries and gained a good reputation there, such as Saudi Arabia, Colombia, South Africa, Singapore, Bangladesh, Malaysia and America.

The factory strictly follows ISO9001:2008 in production, using Japan's most advanced technology and rigidly according to GB7588(similar to EN81) standard to produce elevators in order to make sure MODERN FUJI high-end elevators safety and comfort.

The factory adheres to the idea that "All customer-centric, seeking increasing perfection, struggle more than" to serve every customer and produce impeccable elevator products. Thus we continues increasing the technology research and development and personnel training. Each year the senior engineer from Japan will come to China to guide and train the relevant technology research and development staff to make sure that we can always keep the Japanese advanced technology. In the meantime, high-quality workforce, high-efficient and pragmatic management team continues to enhance the value of MODERN FUJI elevator brand.

We promise: All customer-centric, seeking increasing perfection, struggle more than!





Contents


Product Model and Scope.....	P01
Product Main Components and Configuration.....	P03
Product Advantages.....	P05
Product Series.....	P09
Standard Cabin	P21
Optional Cabin.....	P35
Cop&Lop	P57
Optional Door Panel	P59
Optional Ceiling.....	P77
Optional Handrail	P81
Optional Floor.....	P83
Frame Shaft	P88
Construction Layout and Specifications	P89
Typical Project.....	P138

PRODUCT MODEL AND SCOPE



MODERN FUJI ELEVATOR	MDFJ LIFT	P10 MR Passenger Elevator
		P11 MR Hospital Elevator
		P12 MR Observation Elevator
		P20 MRL Passenger Elevator
		P21 MRL Hospital Elevator
		P22 MRL Observation Elevator
		P30 MRL Passenger Elevator
		P31 MRLSP Passenger Elevator
		P32 RMRL Passenger Elevator
		P50 MR Passenger Elevator
		P60 MRL Passenger Elevator
		P80 LMR Passenger Elevator
		P90 HMR Passenger Elevator
	MDFJ VILLA	H10 Home Elevator
		H20 Home Elevator
		H21 SH Home Elevator
		H22 WR Home Elevator
		H30 Home Elevator (alternative)
		H50 PD Home Elevator
		H60 ST Home Elevator
	MDFJ CARRY	F10 MR Freight Elevator
		F20 MRL Freight Elevator
		F30 PMR Freight Elevator
		F50 MR Car Elevator
		F60 MR Freight Elevator
		F70 MRL Freight Elevator
	MDFJ WALK	E10 Escalator
		M10 Moving Walks

No.	Type	Series	Model	Speed Range (m/s)	Capacity Range (kg)
1	Passenger Elevator	P10 MR Passenger Elevator	P10-Capacity/Speed	1.0-2.5	630-1600
2		P11 MR Hospital Elevator	P11-Capacity/Speed	1.0-2.5	1600
3		P12 MR Observation Elevator	P12-Capacity/Speed	1.0-2.5	630-1600
4		P20 MRL Passenger Elevator	P20-Capacity/Speed	1.0-2.0	630-1600
5		P21 MRL Hospital Elevator	P21-Capacity/Speed	1.0-2.0	1600
6		P22 MRL Observation Elevator	P22-Capacity/Speed	1.0-2.0	630-1600
7		P30 MRL Passenger Elevator	P30-Capacity/Speed	1.0-2.0	400-1000
8		P31 MRLSP Passenger Elevator	P31-Capacity/Speed	1.0-1.75	400-1000
9		P32 RMRL Passenger Elevator	P32-Capacity/Speed	1.0-1.75	450-1000
10		P50 MR Passenger Elevator	P50-Capacity/Speed	1.0-1.5	450-630
11		P60 MRL Passenger Elevator	P60-Capacity/Speed	1.0-1.5	450-630
12		P80 LMR Passenger Elevator	P80-Capacity/Speed	1.0-2.5	800-2000
13		P90 HMR Passenger Elevator	P90-Capacity/Speed	3.0-8.0	1000-2000
14	Home Elevator	H10 Home Elevator	H10-Capacity/Speed	0.4	250-400
15		H20 Home Elevator	H20-Capacity/Speed	0.4	250-400
16		H21 SH Home Elevator	H21-Capacity/Speed	0.4	250-400
17		H22 WR Home Elevator	H22-Capacity/Speed	0.4	250-400
18		H30 Home Elevator (alternative)	H30-Capacity/Speed	0.4	250-400
19		H50 PD Home Elevator	H50-Capacity/Speed	0.3	250-400
20		H60 ST Home Elevator	H60-Capacity/Speed	0.4	250-400
21	Freight Elevator	F10 MR Freight Elevator	F10-Capacity/Speed	0.25-1.75	1000-5000
22		F20 MRL Freight Elevator	F20-Capacity/Speed	0.25-1.75	1000-4000
23		F30 PMR Freight Elevator	F30-Capacity/Speed	0.25-1.75	1000-10000
24		F50 MR Car Elevator	F50-Capacity/Speed	0.25-0.5	3000-5000
25		F60 MR Freight Elevator	F60-Capacity/Speed	0.25-1.75	1000-3000
26		F70 MRL Freight Elevator	F70-Capacity/Speed	0.25-1.75	1000-3000
27	Escalator	E10 Escalator	E10-Angle/Rise	30°/35°	≤12m
28		M10 Moving Walks	M10-Angle/length	10°/11°/12°	≤30m

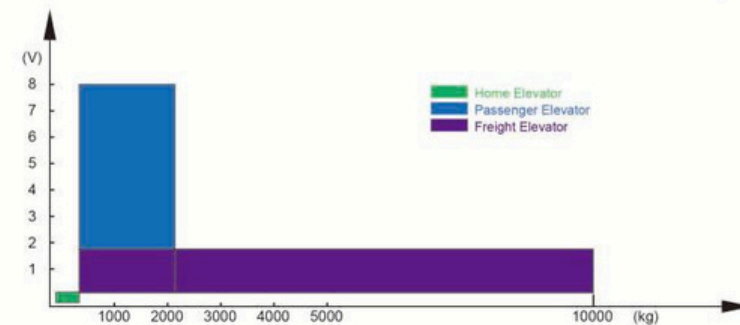

PRODUCT MAIN COMPONENTS AND CONFIGURATION



Top Technology Creates Brand-new Riding Experience




Top Advanced Door Operator System

The door operator control system of Modern fuji elevator applies dual control systems. One group is controlled by main controller of control cabinet, the other one by door operator controller, which greatly reduce non-opening accidents due to trouble of door machine control.

Mute Braking Control Technology

Compared with the traditional voltage open-loop control, it currently applies the more accurate current closed-loop control mode. It accurately controls various steps of action speed and braking torque of the brake. It greatly reduces noise in brake action. It enhances the comfortable travel.

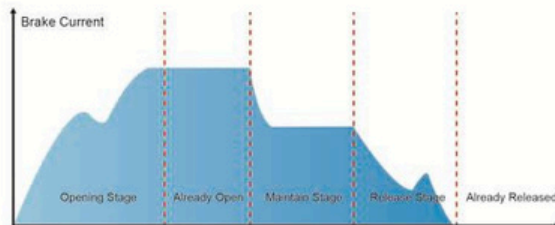

Permanent Magnet Synchronous Gearless Traction Machine

VVVF is developed by modern fuji elevator, and which fits the idea of energy conservation, environmental protection and low carbon. Comparing with the traditional technology, it has low carbon and energy saving, smaller space, low construction cost and low elevator running cost. It easily realizes the requirements of the maintenance of traction machine.



Effective, Speedy And High-end Intellectual Design

It gives first priority to effectiveness in vertical transport field. In order to fully optimize the service efficiency of the elevator system, modern fuji elevator fulfills the intellectual managements such as multi-computer, modular and network control. Through fully computerized intellectual control system. It instantly feeds back the elevator running conditions. It provides the passengers with the most efficient good-collar services.



Serial Communication Technology

It adopts the network communication, which brings great reduction of the wires, enhancement of the reliability and less installation period.

Microcomputer Group Supervision Management System

Duty on/off rush-hour running mode: it satisfies the running requirements in the rush hours of duty on/off the public occasions in the office building and etc. Even operation mode: it adopts the minimized waiting period distribution principle with the prompt and reasonable elevator response. Idle running mode: the elevators have been evenly distributed in the designated area to wait for call in idle times in order to guarantee the quick and timely response towards the outer calls.

Remote Control System Ensures Intelligent Supervision

Through wire or wireless communication, the operation status and access situation of passengers in elevators are real-time protected in remote control center. Malfunction are excluded before occurrence and nip them in the bud to ensure the safety of passengers.



PRODUCT ADVANTAGES



MR PASSENGER ELEVATOR



In order to reduce the construction space, expand the use ratio of the construction space, making the buildings more graceful and beautiful, modern fuji small machine room elevator uses the compact intensive permanent magnet synchronous gearless machine and specialized controller to make the area of the machine room the same with the shaft area.

Reduce 40% elevator energy consumption

Use the advanced permanent magnet synchronous gearless traction machine, reduce 40% energy consumption, realize maintenance-free of the elevator motor.

Save the 50% machine room area

The space room of machine room is just an extension of the shaft size. So it's easy to build and the cost is small. Compact permanent magnet synchronous gearless machine can set apart more space for the machine room to put other control equipments.

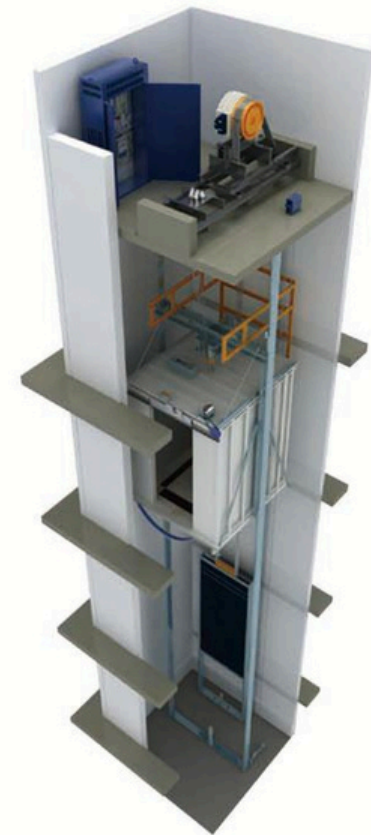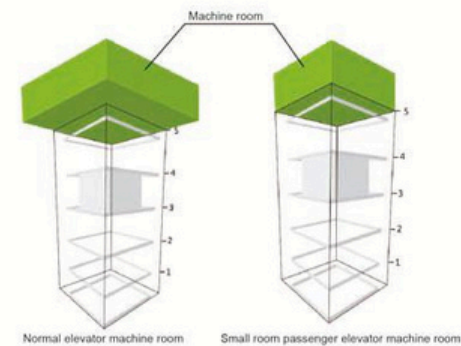

MRL PASSENGER ELEVATOR



MRL PASSENGER ELEVATOR


Taking the environmental protection idea, energy-saving and cost-reducing, saving the construction area and promoting the designing freedom on himself, modern fuji roomless elevator gives full expression to the green human-oriented spirit. This kind of elevator only needs an independent shaft space. Compared with the traditional elevator of the same load, it can save 40% electric power and 10% construction area.

Reduce 40% elevator energy consumption

Use the advanced permanent magnet synchronous gearless traction machine, reduce 40% energy consumption, realize maintenance-free of the elevator motor.

Save 10% construction area

The occupation space of modern fuji machine roomless elevator is reduced, this increases the utilization of the construction space. The design of the integration of machine room and shaft provides the elevator and construction the most degree of freedom.

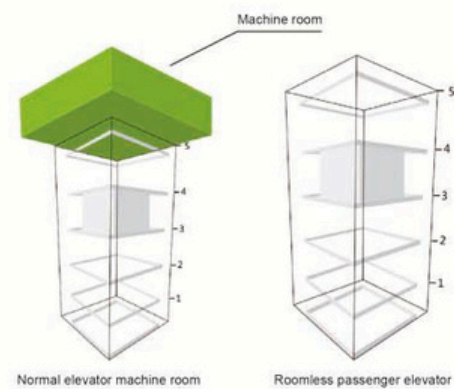

PRODUCT SERIES



P10 MR Passenger Elevator

Product Description: Standard small machine room passenger elevator, widely used in shopping malls, hotels, office buildings, apartments and other places. The design of the commercial building has become more comprehensive, large-scale, and technological, thus extending the demand for more humanized services. MODERN FUJI Elevator knows the commercial building faces the challenges of waiting time, car space, and running comfort. To this end, we provide scientific and rich solutions for commercial projects.

Specifications: Maximum speed 2.5m / s, maximum load 1600kg, maximum rated number: 21 persons, maximum traveling height 125 meters

P20 MRL Passenger Elevator

Product Description: Standard machine roomless passenger elevator, widely used in shopping malls, hotels, office buildings, apartments and other places. Providing flexible elevator solutions for residential and commercial buildings, offering a wide range of cabin design options, superior ride comfort and superior energy efficiency.

Specifications: Maximum speed 2.0m / s, maximum load 1600kg, maximum rated number: 21 persons, maximum traveling height 100 meters

P30 MRL Passenger Elevator

Product Description: Compact machine roomless passenger elevator, widely used in shopping malls, hotels, office buildings, apartments and other places, especially suitable for occasions where the shaft is small. The minimum width of the minimum shaft only needs the net width of the car plus 550mm. The minimum depth of the shaft only needs the net depth of the cabin plus 350mm, and the minimum pit depth is only 400.

Specifications: Maximum speed 2.0m / s, maximum load 1000kg, maximum rated number: 13 persons, maximum traveling height 100 meters

P30 MRLSP Passenger Elevator

Product Description: Compact machine roomless passenger elevator, widely used in shopping malls, hotels, office buildings, apartments and other places, especially suitable for occasions where the Pit is small. The minimum width of the minimum pit only needs 450mm.

Specifications: Maximum speed 1.75m / s, maximum load 1000kg, maximum rated number: 13 persons, maximum traveling height 100 meters

P32 RMRL Passenger Elevator

Product Description: RMRL passenger elevator that counter weight put in behind is designed for special shaft, especially suitable for occasions where the shaft is narrow and the larger car width size needs to be made.

Specifications: Maximum speed 1.75m / s, maximum load 1000kg, maximum rated number: 13 persons, maximum traveling height 90 meters

P50 MR Passenger Elevator

Product Description: Small load small room passenger elevator is a reliable elevator solution. It is a compact machine room elevator designed for residential and commercial buildings. Standardized solutions make it easier to choose the right elevator solution for your residential and commercial building.

Specifications: Maximum speed 1.5m / s, maximum load 630kg, maximum rated number: 8 persons, maximum traveling height 75 meters

P60 MRL Passenger Elevator

Product Description: Small load machine roomless passenger elevator, is an elevator solution designed for residential and commercial buildings. Clear specifications and standardized products make the selection and installation of this solution simple.

Specifications: Maximum speed 1.5m / s, maximum load 630kg, maximum rated number: 8 persons, maximum traveling height 75 meters

P80 LMR Passenger Elevator

Product Description: High-performance small machine room elevator is designed for medium and high-rise buildings. This is a flexible elevator that is ideal for buildings such as office buildings, hotels and residential buildings. MODERN FUJI offers you a wide range of attractive car designs.

Specifications: Maximum speed 2.5m / s, maximum load 2000kg, maximum rated number: 26 persons, maximum traveling height 125 meters



P11 MR Hospital Elevator

Product Description: Small machine room hospital elevator, pay attention to humanized design, create a clean and bright space that is in harmony with the hospital environment, to meet the special needs of hospitals to the greatest extent, and to assist medical staff to complete the sacred mission efficiently and quickly.

Specifications: Maximum speed 2.5m / s, maximum load 1600kg, maximum rated number: 21 persons, maximum traveling height 125 meters

P21 MRL Hospital Elevator

Product Description: Machine roomless hospital elevator is specially developed for the hospital building which can't provide machine room. The hospital elevator is safe, stable and reliable. It has a series of powerful standard functions to ensure the transportation needs of patients. The best performance is provided in the case.

Specifications: Maximum speed 2.0m / s, maximum load 1600kg, maximum rated number: 21 persons, maximum traveling height 100 meters

P12 MR Observation Elevator

Product Description: It can fully meet the needs of indoor and outdoor vertical passenger transportation of large buildings such as shopping malls, hotels and office buildings. Elegant and artistic, the design is diversified. The classic design is a round and hexagonal transparent car. Other products can be provided according to customers' needs. The observation elevator is equipped with modern lighting and elegant exteriors to create a beautiful and modern look. In the process of design, the appearance of the building itself and the environmental landscape have been incorporated into the designer's consideration, and strive to achieve a harmonious integration of the elevator appearance and the building environment in the aesthetic style. At the same time, the specific requirements put forward by the customer are also taken seriously and reflected in the design.

Specifications: Maximum speed 2.5m / s, maximum load 1600kg, maximum rated number: 21 person, maximum lifting height 125 meters

P22 MRL Observation Elevator

The MRL observation Elevator is designed for buildings that cannot provide machine room. Elegant and artistic, the design is diversified, and the elevator's operation adds a beautiful landscape to the building. The observation elevator is equipped with modern lighting and elegant exteriors to create a beautiful and modern look.

Specifications: Maximum speed 2.0m / s, maximum load 1600kg, maximum rated number: 21 person, maximum lifting height 100 meters





P90 HMR Passenger Elevator

Product Description: High-speed elevator is designed for high-rise buildings, providing you with a variety of car decoration design, excellent ride comfort and excellent energy efficiency, fully meet the requirements of high-rise buildings. Specifications: Maximum speed 8m/s, maximum load 2000kg, maximum rated number: 26 person, maximum lifting height of 400 meters

H10 Home Elevator

Product Description: High-end home Lift is specially developed for villas, breaking through the pattern and creating more space; Multiple security protection, giving families unlimited care; green energy-saving technology, opening the era of elevator appliances. The permanent magnet synchronous door system is adopted, the gantry frame and the tie rod structure are more stable, the new generation permanent magnet synchronous gearless traction machine and the LED automatic lighting system effectively reduce the energy consumption. Applicable to household power supply, 1KW low energy consumption brake, power consumption in the refrigerator and other electrical appliances, become your real energy-saving home appliances. It can provide independent steel structure solutions, configure aluminum alloy steel structure wells, rich surface treatment technology, and a variety of shaft glass to choose from, fully realize the elevator integrated solution. Specifications: Maximum speed 0.4m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height 12 meters.

H20 Home Elevator

Product Description: A small villa elevator product specially developed for the narrow space of the elevator shaft. There is the space, there can be a lift. Make full use of the customer's shaft space and try to realize the design of the large car size. The minimum width of the minimum shaft is only the net width of the car plus 500mm. The minimum pit depth is only 200mm. Specifications: Maximum speed 0.4m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height is 12 meters.

H21 SH Home Elevator

Product Description: A small villa elevator product specially developed for the narrow space of the elevator shaft. There is the space, there can be a lift. Make full use of the customer's shaft space and try to realize the design of the large car size. The minimum width of the minimum shaft is only the net width of the car plus 500mm. The minimum pit depth is only 350mm. The minimum OH height is only 2600mm. Specifications: Maximum speed 0.4m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height is 12 meters.

H22 WR Home Elevator

Product Description: A small villa elevator product specially developed for the narrow space of the elevator shaft. The elevator counterweight is located at the back of the shaft, so that the car width can be as large as possible, the door opening size is as large as possible. The minimum pit depth is only 200mm. The minimum OH height is only 3000mm. Specifications: Maximum speed 0.4m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height is 12 meters.

H30 Home Elevator (alternative)

Product Description: The villa elevator product developed for the special shaft is especially suitable for the case where the door is opened at right angles. It is also suitable for the occasion where the unidirectional shaft can only be used. Specifications: Maximum speed 0.4m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height 12 meters.

H50 PD Home Elevator

Product Description: A small villa elevator product specially developed for the narrow space of the elevator shaft. There is the space, there can be a lift. Make full use of the customer's shaft space and try to realize the design of the large car size. The minimum width of the minimum shaft is only the net width of the car plus 400mm. Equipped the positive drive machine, no counterweight. Specifications: Maximum speed 0.3m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height is 12meters.

H60 ST Home Elevator

Product Description: A small villa elevator product specially developed for the narrow space of the elevator shaft. There is the space, there can be a lift. Make full use of the customer's shaft space and try to realize the design of the large car size. Equipped the steel tape machine. Specifications: Maximum speed 0.4m/s, maximum load 400kg, maximum rated number: 5 person, maximum lifting height is 12meters.



F10 MR Freight Elevator

Product Description: The high-power, high-performance freight elevator is ideal for a variety of buildings with a large number of vertical cargo transportation requirements, including: supermarkets, shopping centers, airports, warehouses, hospitals, hotels, factories and office buildings.

Specifications: Maximum speed 1.75m / s, maximum load 5000kg, maximum lifting height 50 meters

F20 MRL Freight Elevator

Product Description: Designed for the special freight elevators that don't have the machine room, the permanent magnet high-efficiency non-size traction machine and the 32-bit professional elevator control system are used to maximize the effectiveness of the MRL freight elevator.

Specifications: Maximum speed 1.75m / s, maximum load 4000kg, maximum lifting height 50 meters

F30 PMR Freight Elevator

Product Description: The high-performance freight elevator is suitable for all kinds of buildings with large cargo vertical transportation requirements. It is equipped with permanent magnet high-efficiency gearless traction machine, which is energy-saving and green. It can achieve a maximum load capacity of 10 tons, providing a perfect solution for large load transport applications.

Specifications: Maximum speed 1.75m / s, maximum load 10000kg, maximum lifting height 50 meters

F50 MR Car Elevator

Product Description: Tailored for the delivery of cars, the largest car size is 3500mm * 7000mm, standard photoelectric alarm system, fully meet the requirements of automotive transportation.

Specifications: Maximum speed 0.5m / s, maximum load 5000kg, maximum lifting height 10 meters

F60 MR Freight Elevator

Product Description: MR freight elevator with sheet metal structure, integrated design, more aesthetic appearance, easy to install.

Specifications: Maximum speed 1.75m / s, maximum load 3000kg, maximum lifting height 50 meters

F70 MRL Freight Elevator

Product Description: The MRL freight elevator with sheet metal structure, integrated design, more aesthetic appearance, easy to install.

Specifications: Maximum speed 1.75m / s, maximum load 3000kg, maximum lifting height 50 meters

CARGO ELEVATOR



Cargo Elevator Configuration

Car Ceiling: Painted steel sheet (color optional)
 Car Wall: Painted steel sheet (color optional)
 Lighting: Energy-saving fluorescent lamp
 Car Door: Painted steel sheet (color optional)
 Car Floor: Riffled steel sheet

Energy-saving

This cargo elevator adopts the VVVF technology which can sharply reduce the power consumption and power supply capacity.

This technology fully shows an advantage on the energy-saving compared to conventional AC-2 technology.

Function of Optional Configuration

The unique curving running state of VVVF cargo elevator can adjust the speed smoothly and greatly improve the comfort, leveling accuracy and running noise. Therefore, the cargo can arrive at the designated floor safely and steadily.

Comfort and Steady


The greatest characteristic of VVVF cargo elevator is the constant torque characteristic. No matter what the load is, it has no impact on the speed, comfort level and leveling accuracy.




Item	Style
Car ceiling	Painted steel
Car Wall Car Door	Painted steel
COP	Hairline stainless steel
Car Ceiling	Checkered steel plate
Sill	Alloyed hard aluminum




Two panels side opening door



Two panels center opening door



Single way door



Double way door

ESCALATOR




Standard Safety Device

- 1.Phase lack and phase dislocation protection** If lack of phase or wrong phase, escalator (automatic sidewalk) will stop automatically.
- 2.The motor overload protection** Current by more than 15% of the rated current, the escalator stop running automatically.
- 3.The electric circuits protection** Providing automatic circuit disconnection device in order to protect the escalator (automatic sidewalk) circuit and power supply components.
- 4.Handrail entry protection** When caught in the handrail belt at the entrance of external things, escalators (automatic sidewalk) will stop running automatically.
- 5.Comb plate safety protection device** When the foreign object was sandwiched between comb plate, escalators (automatic sidewalk) will stop running automatically.
- 6.Cascade collapse protection device** When found abnormal curved cascade, escalators, automatic sidewalks) will stop running before the cascade into the comb plate.
- 7.Drive chain rupture protection** When the driving chain is overstretched or fractured, escalators (automatic sidewalk) will stop running automatically.
- 8.Cascade chain rupture protection** When the cascade (pedal) chain is overstretched or fractured, escalators (automatic sidewalk) will stop running automatically.
- 9.Overspeed protection** The escalators (automatic sidewalk) will stop running automatically when speeding.
- 10.Not operation reverse protection** When the reverse operation violates the predetermined direction, escalators (automatic sidewalk) will stop running.
- 11.Warning line** Yellow synthetic resin line is located in the front and sides of escalator pedal, In order to prevent the passengers into the edge of the adjacent cascade and cascade and apron plates, in the line on both sides of the cascade is higher than the surface of the pedal (automatic sidewalk provide colors of paint line)
- 12.Emergency stop button** When press the button, escalators (automatic sidewalk) will stop running.
- 13.Apron board protection** When a foreign object was sandwiched between the apron board and cascade, escalators (automatic sidewalk) will stop running.
- 14.Brake protection** When lack of power or any safety device, brake device will go into effect by spring force function, making the escalators (automatic sidewalks) stop running.
- 15.Overhaul safety switch** A safety device preventing the escalator starting when repair and maintenance.
- 16.Step demarcation lighting** Escalator up and down side, stair lower part is equipped with lighting to remind passengers pay attention to safety.
- 17.Start the alarm device** The alarm bells ring when escalator starting to remind passengers to pay attention to safety.
- 18.control guard for handrail breakage** When the handrail breakage, escalators will stop running.

The optional safety equipment

- 19.Handrail speed monitor** If the handrail belt speed is slower than the steps in a certain percentage, escalator (automatic sidewalk) will stop running.
- 20.Skirt guard brush** Between the skirt guard and cascade with a brush to make the passengers' shoes won't touch the skirt guard (not only limited to the escalator)
- 21.Emergency brake** Drive chain rupture or brake failure prevents the escalator down to ensure staff safety (6 m < H must be equipped with)

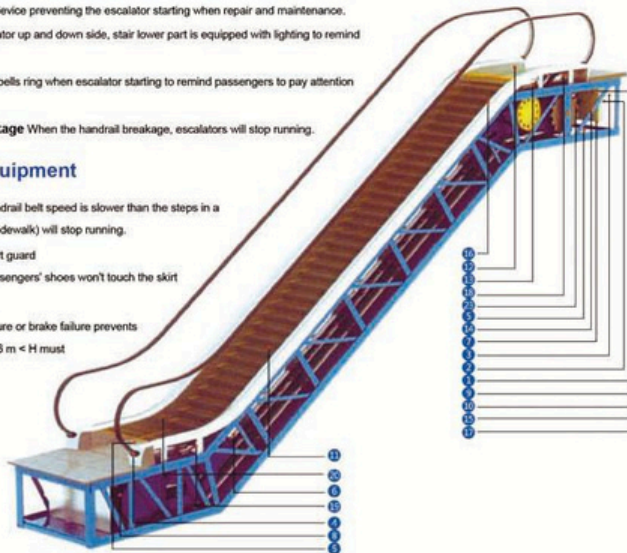

E10 Escalator

Product Description: The energy-efficient, commercial escalator optimizes the retail-oriented business environment, providing a smooth, safe ride and enjoyable shopping.

The public transport escalator is a very durable escalator designed for a wide range of passenger traffic and complex public transport environments, such as subway stations and airports.

Specifications: Maximum speed 0.5m / s, angle: 30 degrees, 35 degrees, step width: 600mm, 800mm, 1000mm maximum lifting height 12 meters

M10 Moving Walks

Product Description: The sloping moving walks is designed for large passenger flow environments such as shopping centers, department stores, supermarkets and hypermarkets, providing a safe and convenient access.

The horizontal moving walks is designed primarily for the infrastructure of the transportation environment, such as airports, railways, stadiums and other transportation centers.

Specifications: Maximum speed 0.5m/s, angle: 0 degrees, 10 degrees ~ 12 degrees, step width: 800mm, 1000mm, maximum running length 30 meters



STANDARD CABIN

MOARK
ascensores

FUJI
MODERN FUJI



MDFJ-801

Cabin: 304 Hairline Stainless Steel Finished, Mirror Stainless Steel Finished, Mirror Etching Stainless Steel Finished

Ceiling: Hairline Stainless Steel Finished, acrylic lighting panel

Handrail: Round Hairline Stainless Steel Finished on Rear Side


Floor: PVC (Optional: Marble)

COP: Hairline Stainless Steel Finished, One-Piece



21 •
• 22

STANDARD CABIN

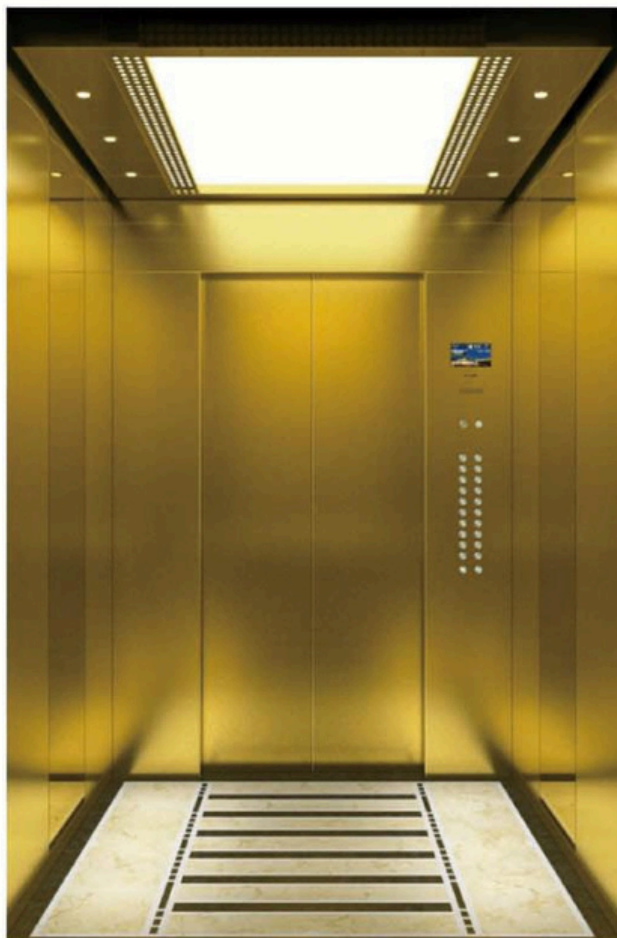

MDFJ-802


Cabin: Golden Hairline Stainless Steel Finished, Golden Mirror Stainless Steel Finished, Golden Mirror Etching Stainless Steel Finished.

Ceiling: Golden Hairline Stainless Steel Finished, acrylic lighting panel, LED

Handrail: Round Golden Hairline Stainless Steel Finished on Rear Side

Floor: PVC (Optional: Marble)

COP: Golden Hairline Stainless Steel Finished, One-Piece

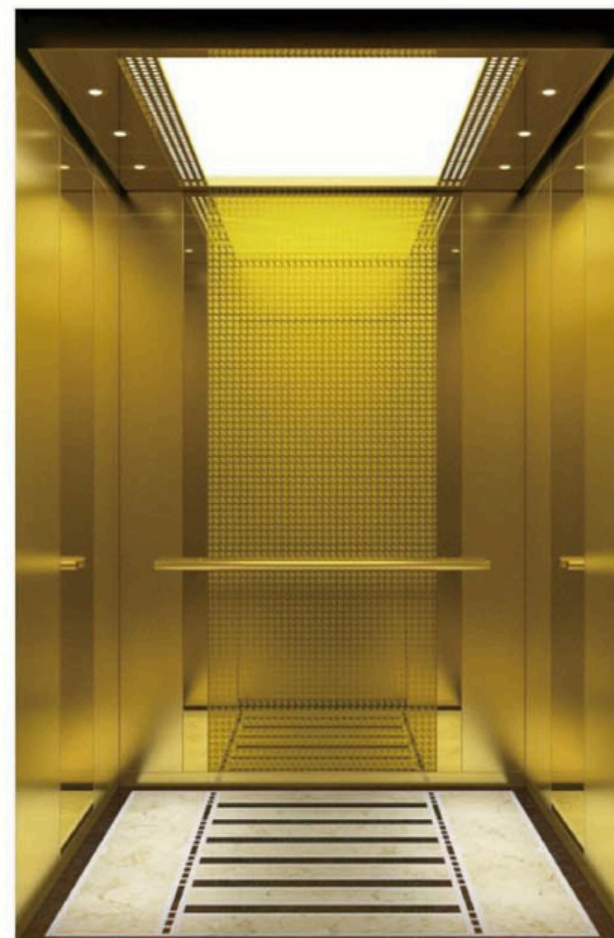

STANDARD CABIN



MDFJ-803


Cabin: 304 Hairline Stainless Steel Finished, Mirror Stainless Steel Finished, Mirror Etching Stainless Steel Finished
Ceiling: Mirror Stainless Steel Finished, LED
Handrail: Round Hairline Stainless Steel Finished on Rear Side
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished, One-Piece



MDFJ-804

Cabin: 304 Hairline Stainless Steel Finished, Mirror Stainless Steel Finished, Mirror Etching Stainless Steel Finished
Ceiling: Hairline Stainless Steel Finished, acrylic lighting panel, LED
Handrail: Back Wall Hairline Stainless Steel Flat Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished, One-Piece

STANDARD CABIN

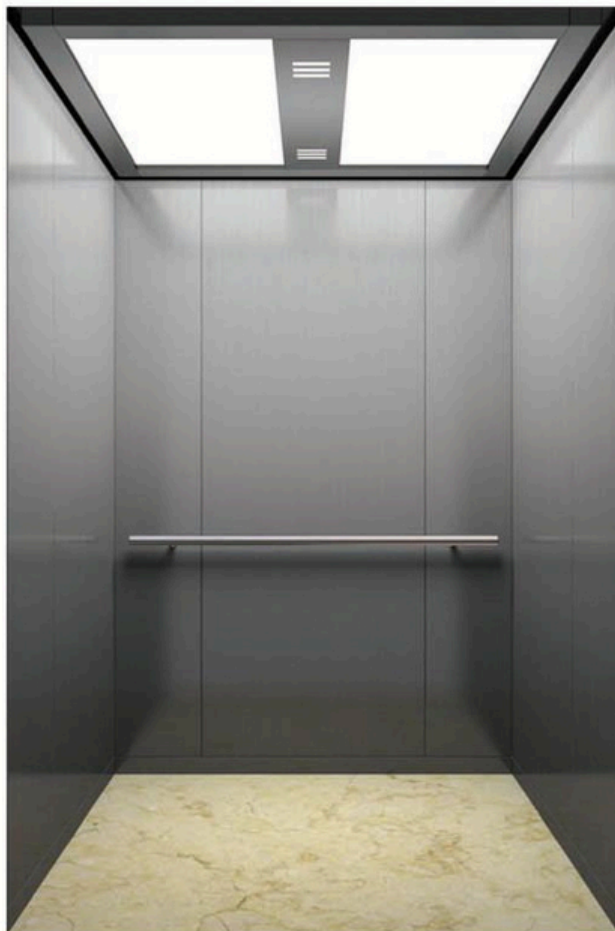

MDFJ-805

Cabin: 304 Hairline Stainless Steel Finished
Ceiling: Hairline Stainless Steel, Acrylic Translucent Board
Handrail: Back Wall Round Hairline Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished, One-Piece



MDFJ-806


Cabin: Golden Hairline Stainless Steel Finished, Mirror Stainless Steel Finished, Golden Mirror Etching
Ceiling: Golden Hairline Stainless Steel Finished, LED
Handrail: Titanium Gold-plated Stainless Steel Round Armrest On The Back Wall
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished, One-Piece

STANDARD CABIN



MDFJ-807

Cabin: Mirror Stainless Steel Finished, Painted Texture Decorative Panel
Ceiling: Mirror Stainless Steel Finished, White Organic Light-transmissive Plate
Handrail: Stainless Steel Square Tube Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished

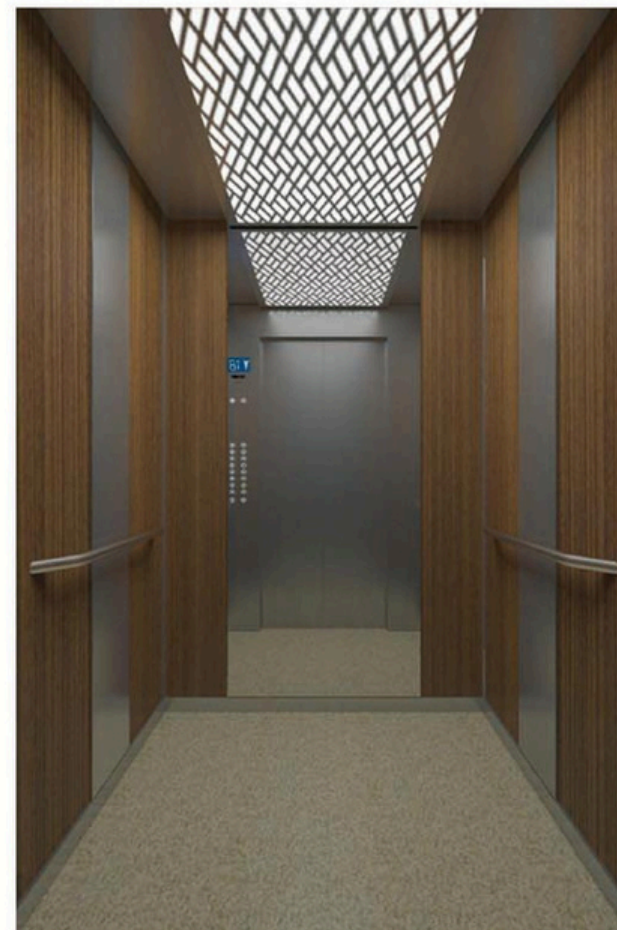

MDFJ-808


Cabin: Hairline Stainless Steel Finished, Mirror Stainless Steel Finished, Painted Texture Decorative Panel
Ceiling: Hairline Stainless Steel Finished, White Organic Light-transmissive Plate
Handrail: Stainless Steel Round Tube Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished

STANDARD CABIN



MDFJ-809


Cabin: Mirror Stainless Steel Finished, Frosted Stainless Steel, Painted Decorative Panels
Ceiling: Mirror Stainless Steel Finished, White Organic Light-transmissive Plate
Handrail: Stainless Steel Square Tube Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished

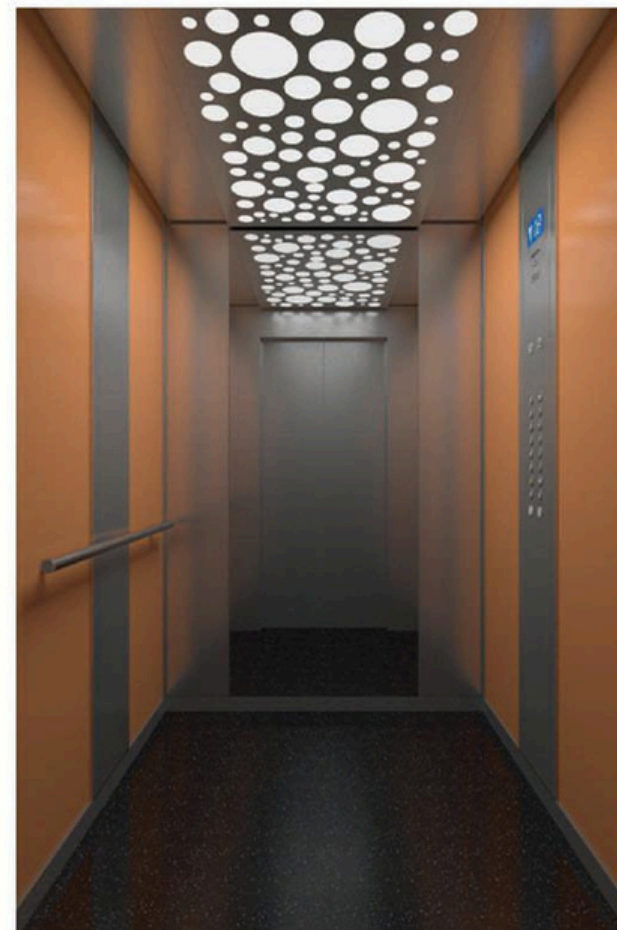

MDFJ-810

Cabin: Mirror Stainless Steel Finished, Hairline Stainless Steel Finished, Painted Texture Decorative Board
Ceiling: Hairline Stainless Steel Finished, White Organic Light-transmissive Plate
Handrail: Stainless Steel Round Tube Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished

STANDARD CABIN

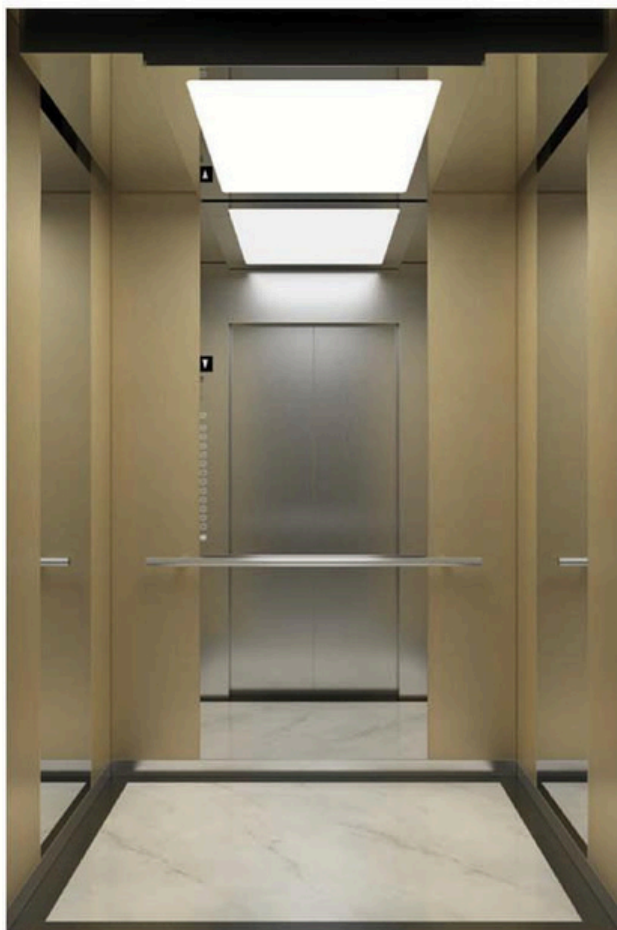

MDFJ-811

Cabin: Mirror Stainless Steel Finished, Painted Texture Decorative Panel
Ceiling: Mirror Stainless Steel Finished, White Organic Light-transmissive Plate
Handrail: Stainless Steel Round Tube Handrail
Floor: PVC (Optional: Marble)
COP: Hairline Stainless Steel Finished



MDFJ-812

Cabin: Mirror Stainless Steel Finished, Frosted Stainless Steel, Painted Decorative Panels
Ceiling: Frosted Stainless Steel, White Organic Light-transmissive Plate
Handrail: Stainless Steel Round Tube Handrail
Floor: PVC (Optional: Marble)
COP: Frosted Stainless Steel

OPTIONAL CABIN



MDFJ-101

◆ Ceiling: Mirror St.St vault panel with acrylic lights decoration.
Middle Panel: Mirror, Etching, Rose Golden.
Side Panel: Mirror Rose Golden.



MDFJ-103

◆ Ceiling: Mirror St.St vault panel with acrylic lights decoration.
Middle Panel: Mirror, Etching, Golden.
Side Panel: Hairline, Golden.



MDFJ-106

◆ Ceiling: St.St frame with milky acrylic vaulted top panel, lighting deco two sides.
Middle Panel: Mirror, Hairline, Golden.
Side Panel: Mirror, Golden.



MDFJ-107

◆ Ceiling: St.St frame with multi-layer lighting board, acrylic lighting deco.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-104

◆ Ceiling: Mirror St.St flat frame with acrylic lights decoration.
Middle Panel: Mirror, Etching, Concave Golden.
Side Panel: Mirror Concave Golden.



MDFJ-105

◆ Ceiling: St.St frame with white poychrome comb, acrylic lights decoration.
Middle Panel: Mirror, Etching, Golden.
Side Panel: Mirror, Etching, Golden.



MDFJ-108


◆ Ceiling: St.St frame with milky white acrylic lighting deco two sides.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-109

◆ Ceiling: St.St frame with green white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline, Concave Golden.
Side Panel: Mirror, Etching, Hairline, Concave Golden.

OPTIONAL CABIN



MDFJ-110

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Pated Wooden Deco.



MDFJ-111

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Mirror.



MDFJ-114

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror.
Side Panel: Mirror, Etching.



MDFJ-115

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror.
Side Panel: Mirror, Etching.



MDFJ-112

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Mirror.



MDFJ-113

◆ Ceiling: St.St frame with acrylic lighting panel.
Middle Panel: Mirror, Hairline, Etching.
Side Panel: Mirror.



MDFJ-116

◆ Ceiling: St.St frame with painted acrylic lighting panel and lights on side.
Middle Panel: Mirror, Etching.
Side Panel: Hairline, Mirror, Etching.



MDFJ-117


◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Mirror.

OPTIONAL CABIN



MDFJ-118

Celling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-119

Celling: St.St frame with acrylic lighting panel, lights in middle.
Middle Panel: Black Golden Mirror.
Side Panel: Black Hairline.



MDFJ-122

Celling: Golden St.St frame with acrylic panel, lights on side.
Middle Panel: Golden Mirror, Etching.
Side Panel: Golden Mirror, Etching.




MDFJ-123

Celling: Golden St.St frame with acrylic panel.
Middle Panel: Golden Mirror, Etching.
Side Panel: Golden Mirror, Etching.



MDFJ-120

Celling: St.St frame with central lights.
Middle Panel: Mirror, Etching.
Side Panel: Golden Hairline, Etching.



MDFJ-121

Celling: Golden St.St frame with white etching.
Middle Panel: Golden Mirror, Etching.
Side Panel: Golden Mirror, Etching.



MDFJ-125


Celling: Golden St.St frame with acrylic panel.
Middle Panel: Golden Mirror, Etching.
Side Panel: Golden Mirror, Etching.



MDFJ-126

Celling: Golden St.St frame with acrylic panel.
Middle Panel: Concave Golden Mirror, Etching.
Hairline.
Side Panel: Hairline.

OPTIONAL CABIN



MDFJ-127

Celling: Golden St.St frame with acrylic panel.
Middle Panel: Golden Mirror, Etching, Hairline.
Side Panel: Golden, Mirror.



MDFJ-128

Celling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Mirror, Hairline.



MDFJ-131

Celling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-132

Celling: St.St frame with acrylic lighting panel.
Middle Panel: Golden Mirror, Etching.
Side Panel: Golden Mirror.




MDFJ-129

Celling: St.St frame with white acrylic panel, lights in middle.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-130

Celling: St.St frame with acrylic lighting panel.
Middle Panel: Mirror.
Side Panel: Hairline.

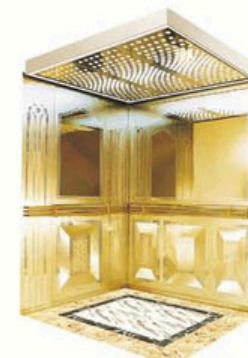

MDFJ-133

Celling: Golden St.St frame with acrylic lighting panel.
Middle Panel: Golden Mirror, Etching, Hairline.
Side Panel: Golden Mirror, Etching, Hairline.



MDFJ-134

Celling: Golden St.St frame with white acrylic lighting panel.
Middle Panel: Concave Golden, Mirror, Hairline, Etching.
Side Panel: Golden, Hairline.

OPTIONAL CABIN



MDFJ-135

Celling: St.St frame with white acrylic lighting panel, lights in middle.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Mirror, Etching, Hairline.



MDFJ-136

Celling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Mirror, Etching, Hairline.



MDFJ-139

Celling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline, Convace Golden.
Side Panel: Mirror, Etching, Hairline, Convace Golden.



MDFJ-140

Celling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-137

Celling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline, Concave Golden.
Side Panel: Mirror, Etching, Hairline.



MDFJ-138

Celling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline, Concave Golden.
Side Panel: Mirror, Etching, Hairline, Concave Golden.



MDFJ-141

Celling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-142

Celling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.

OPTIONAL CABIN



MDFJ-143

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-145

Ceiling: St.St frame with white lighting panel, lights on side.
Middle Panel: Mirror, Etching.
Side Panel: Mirror, Etching.



MDFJ-148

Ceiling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-149

Ceiling: St.St frame with white acrylic lighting panel, lights in middle.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-146

Ceiling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-147

Ceiling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-150

Ceiling: St.St frame with acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-151

Ceiling: St.St frame with white lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.

OPTIONAL CABIN



MDFJ-152

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline, Concave Golden.
Side Panel: Hairline.



MDFJ-153

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline, Concave Golden.
Side Panel: Hairline.



MDFJ-157

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-158

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching.
Side Panel: Hairline.



MDFJ-154

◆ Ceiling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-155

◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-159


◆ Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline, Concave Golden.
Side Panel: Hairline.



MDFJ-160

◆ Ceiling: St.St frame with white acrylic lighting panel, lights in middle.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.

OPTIONAL CABIN

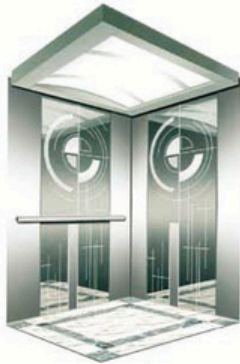

MDFJ-161

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-162

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-165

Ceiling: St.St frame with white acrylic lighting panel, lights in middle.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-166

Ceiling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Golden.
Side Panel: Hairline.



MDFJ-163

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-164

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-167

Ceiling: St.St frame with white acrylic lighting panel, lights in middle.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.



MDFJ-168


Ceiling: St.St frame with white acrylic lighting panel, lights on side.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.

OPTIONAL CABIN




MDFJ-169

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline.
Side Panel: Hairline.

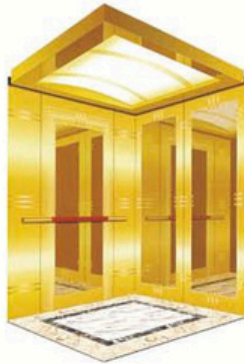

MDFJ-170

Ceiling: St.St frame with white acrylic lighting panel.
Middle Panel: Mirror, Etching, Hairline, Golden.
Side Panel: Mirror, Etching, Hairline, Golden.

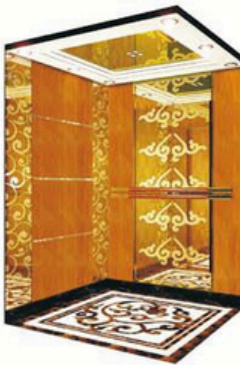

MDFJ-171


Ceiling: Mirror St.St vault panel with lights decoration.
Middle Panel: Mirror, Etching, Golden, Paste
Wooden Deco.
Side Panel: Mirror, Etching, Golden.



MDFJ-172


Ceiling: Mirror St.St vault panel with white acrylic lights decoration.
Middle Panel: Mirror, Etching, Golden.
Side Panel: Mirror, Golden, Hairline, Etching.

LUXURY ELEVATOR CABIN

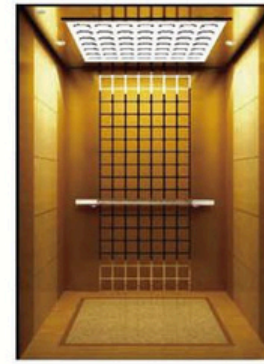

MDFJ-221

Middle and Rear Panel:
Mirror, Etching, Hairline, Golden.

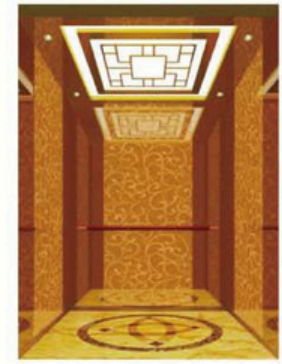


MDFJ-222

Middle and Rear Panel:
Mirror, Etching, Hairline, Golden.



MDFJ-227

Middle and Rear Panel:
Mirror, Etching, Hairline, Golden.

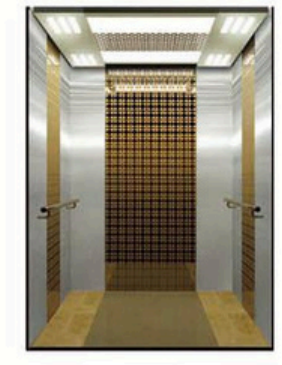

MDFJ-228

Middle and Rear Panel:
Mirror, Etching, Hairline, Golden.

LUXURY ELEVATOR CABIN




MDFJ-239

Middle and Rear Panel:
Mirror, Etching, Hairline, Rose Golden.




MDFJ-245

Middle and Rear Panel:
Mirror, Etching, Hairline.



MDFJ-256

Middle and Rear Panel:
Mirror, Etching, Hairline, Golden, Rose Golden.



MDFJ-257

Middle and Rear Panel:
Mirror, Etching, Hairline.

OBSERVATION ELEVATOR CABIN



MDFJ-201

Upper&Bottom Canopy: Hairline
Viewing Glass: Laminated Glass (2Layers)
Cabin Wall: Hairline St/St
Handrail: St/St. Tube
Floor: PVC



MDFJ-202

Upper&Bottom Canopy: Hairline
Viewing Glass: Laminated Glass (2Layers)
Cabin Wall: Hairline Etching St/St
Handrail: St/St. Tube
Floor: PVC



MDFJ-203

Upper&Bottom Canopy: Baked Enamel with Light Deco
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Mirror Etching St/St
Handrail: St/St. Tube
Floor: PVC



MDFJ-204

Upper&Bottom Canopy: Half Round Baked Enamel with Acrylic Cap, Light Deco
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Mirror Etching St/St
Handrail: St/St. Tube
Floor: PVC

OBSERVATION ELEVATOR CABIN



MDFJ-205

Upper&Bottom Canopy: Half Round
Hairline St./St with Light Deco
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Mirror Etching St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-206

Upper&Bottom Canopy: Baked Enamel with Light Deco
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Golden Mirror Etching St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-209

Upper&Bottom Canopy: Baked Enamel with Light Deco
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Hairline Etching St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-210

Upper&Bottom Canopy: Hairline with Light Deco
Viewing Glass: Laminated Glass (2Layers)
Cabin Wall: Hairline St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-207

Upper&Bottom Canopy: Baked Enamel
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Mirror Etching St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-208

Upper&Bottom Canopy: Baked Enamel
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Hairline Etching St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-211

Upper&Bottom Canopy: Baked Enamel
Viewing Glass: Laminated Glass (3Pcs)
Cabin Wall: Hairline Etching St./St
Handrail: St./St. Tube
Floor: PVC



MDFJ-212

Upper&Bottom Canopy: Baked Enamel with Light Deco
Viewing Glass: Laminated Glass (2Layers)
Cabin Wall: Hairline St./St
Handrail: St./St. Tube
Floor: PVC



OPTIONAL DOOR PANEL



MDFJ-301

Mirror, Hairline, Etching



MDFJ-302

Mirror, Etching



MDFJ-303

Mirror, Hairline, Etching




MDFJ-307

Mirror, Etching, Rose Golden



MDFJ-308

Mirror, Etching, Rose Golden

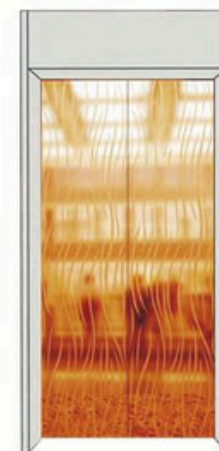

MDFJ-309

Mirror, Etching, Rose Golden



MDFJ-304

Mirror, Etching

Floor: PVC



MDFJ-305


Mirror, Etching

Floor: PVC



MDFJ-306

Mirror, Etching




MDFJ-310

Mirror, Etching, Rose Golden



MDFJ-311

Mirror, Etching, Golden



MDFJ-312

Mirror, Etching, Golden

OPTIONAL DOOR PANEL



MDFJ-313

Hairline, Etching



MDFJ-314

Mirror, Etching



MDFJ-315

Mirror, Etching




MDFJ-319

Mirror, Etching



MDFJ-320

Mirror, Etching, Rose Golden

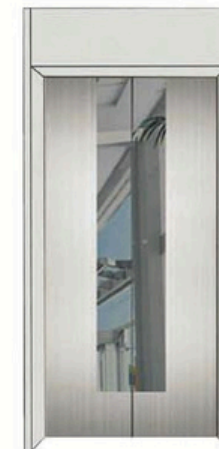

MDFJ-321

Mirror, Hairline



MDFJ-316

Mirror, Etching



MDFJ-317

Mirror, Etching



MDFJ-318

Mirror, Etching




MDFJ-322

Mirror, Etching



MDFJ-323


Mirror, Etching, Rose Golden



MDFJ-324

Mirror, Etching, Golden

OPTIONAL DOOR PANEL

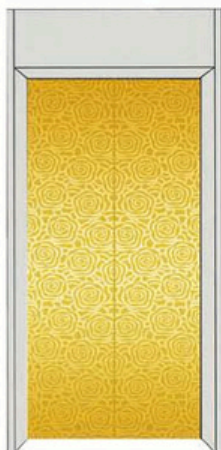


MDFJ-325

Mirror, Etching, Golden



MDFJ-326

Mirror, Etching, Golden, Hairline



MDFJ-327

Mirror, Etching, Golden, Hairline




MDFJ-331

Mirror, Etching, Golden



MDFJ-332

Mirror, Etching, Golden



MDFJ-333

Mirror, Etching, Golden



MDFJ-328

Mirror, Etching, Golden, Hairline



MDFJ-329

Mirror, Etching, Golden



MDFJ-330

Mirror, Etching, Golden



MDFJ-334

Mirror, Etching, Concave Golden



MDFJ-335

Mirror, Etching, Golden, Hairline



MDFJ-336


Mirror, Etching, Golden

OPTIONAL DOOR PANEL



MDFJ-337

Mirror, Etching, Golden, Hairline



MDFJ-338

Mirror, Etching, Hairline



MDFJ-339

Mirror, Etching, Golden, Hairline



MDFJ-343

Mirror, Etching, Hairline



MDFJ-344

Mirror, Etching, Golden, Hairline



MDFJ-345

Mirror, Etching, Golden, Hairline



MDFJ-340

Mirror, Etching, Concave Golden



MDFJ-341

Mirror, Etching, Hairline




MDFJ-342

Mirror, Etching



MDFJ-346

Mirror, Etching, Hairline



MDFJ-347

Mirror, Etching, Hairline



MDFJ-348


Mirror, Etching

OPTIONAL DOOR PANEL



MDFJ-349

Mirror, Etching



MDFJ-350

Mirror, Etching, Hairline



MDFJ-351

Mirror, Etching, Hairline,
Concave Golden



MDFJ-355

Mirror, Etching, Hairline



MDFJ-356

Mirror, Etching, Hairline



MDFJ-357

Mirror, Etching, Hairline



MDFJ-352

Mirror, Etching, Hairline,
Concave Golden



MDFJ-353

Mirror, Etching, Golden, Hairline



MDFJ-354

Mirror, Etching, Hairline




MDFJ-358

Mirror, Etching, Hairline
Concave Golden



MDFJ-359

Mirror, Etching, Hairline

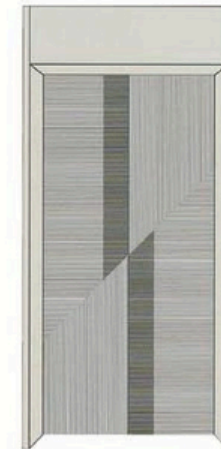

MDFJ-360

Mirror, Etching

OPTIONAL DOOR PANEL



MDFJ-361

Mirror, Etching, Hairline



MDFJ-362

Mirror, Etching, Hairline



MDFJ-363

Mirror, Etching, Hairline



MDFJ-367

Mirror, Etching, Hairline



MDFJ-368

Mirror, Etching, Hairline



MDFJ-369

Mirror, Etching, Hairline



MDFJ-364

Mirror, Etching, Hairline



MDFJ-365

Mirror, Etching, Hairline



MDFJ-366

Mirror, Etching, Hairline,
Concave Green



MDFJ-370

Mirror, Etching, Hairline,
Concave Golden



MDFJ-371

Mirror, Etching, Hairline



MDFJ-372

Mirror, Etching

OPTIONAL DOOR PANEL



MDFJ-373

Mirror, Etching, Hairline



MDFJ-374

Mirror, Etching



MDFJ-375

Mirror, Etching, Hairline



MDFJ-379

Mirror, Etching, Hairline



MDFJ-380

Mirror, Etching, Hairline



MDFJ-381

Mirror, Etching, Hairline



MDFJ-376

Mirror, Etching, Hairline
Curved Surface



MDFJ-377

Mirror, Etching, Hairline



MDFJ-378

Mirror, Etching, Hairline



MDFJ-382

Mirror, Etching, Hairline



MDFJ-383

Mirror, Etching, Hairline



MDFJ-384

Mirror, Etching, Hairline

OPTIONAL DOOR PANEL



MDFJ-385

Mirror, Etching, Hairline




MDFJ-386

Mirror, Etching, Hairline



MDFJ-387

Mirror, Hairline

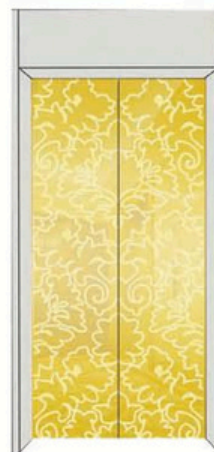

MDFJ-391

Mirror, Etching, Golden



MDFJ-392

Mirror, Etching, Golden



MDFJ-393

Mirror, Etching, Golden



MDFJ-388

Mirror, Etching, Golden



MDFJ-389

Mirror, Etching, Golden




MDFJ-390

Mirror, Etching, Golden



MDFJ-394

Mirror, Etching, Golden

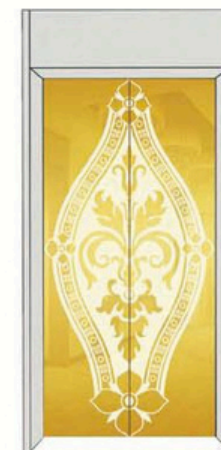

MDFJ-395


Mirror, Etching, Golden



MDFJ-396

Mirror, Etching, Golden

OPTIONAL DOOR PANEL

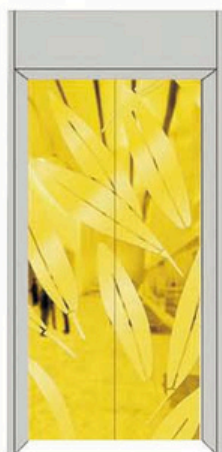


MDFJ-397

Mirror, Etching, Golden




MDFJ-398

Mirror, Etching, Golden

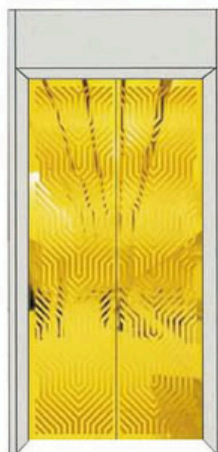


MDFJ-399

Mirror, Etching, Golden

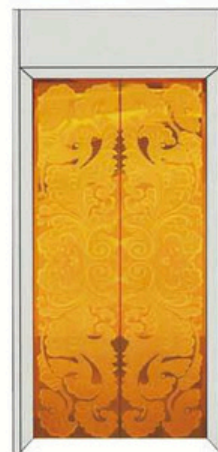

MDFJ-3103

Mirror, Etching, Rose Golden

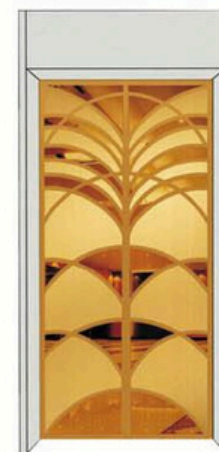

MDFJ-3104

Mirror, Etching, Rose Golden




MDFJ-3105

Mirror, Etching, Rose Golden



MDFJ-3100

Mirror, Etching, Golden



MDFJ-3101

Mirror, Etching, Golden



MDFJ-3102

Mirror, Etching, Golden



MDFJ-3106

Mirror, Etching, Golden



MDFJ-3107

Mirror, Etching, Golden



MDFJ-3108

Mirror, Etching, Rose Golden

OPTIONAL CEILING




MDFJ-501

Mirror st./st. frame with acrylic top panel, down light.



MDFJ-502

Golden mirror st./st. frame with acrylic top panel, down light.

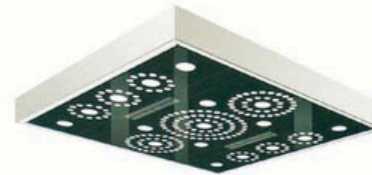


MDFJ-507

Mirror st./st. frame with acrylic top panel.



MDFJ-508

Mirror st./st. frame with acrylic top panel, down light.

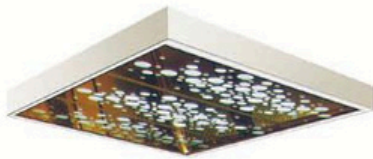

MDFJ-503

Mirror st./st. frame with acrylic top panel.



MDFJ-504

Golden mirror st./st. frame with acrylic top panel, down light.




MDFJ-509

Mirror st./st. frame with acrylic top panel, down light.



MDFJ-510

Mirror st./st. frame with acrylic top panel, down light.

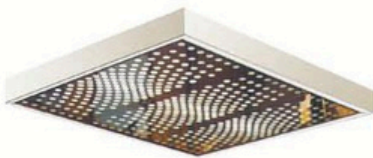


MDFJ-505

Mirror st./st. frame with acrylic top panel.



MDFJ-506

Mirror st./st. frame with acrylic top panel.

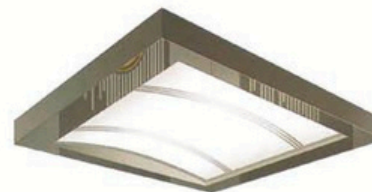

MDFJ-511


Mirror st./st. frame with acrylic top panel.



MDFJ-512

Mirror st./st. frame with acrylic top panel, down light.

OPTIONAL CEILING

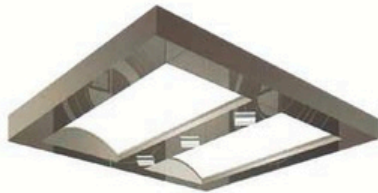

MDFJ-513

◆ Mirror st./st. frame with acrylic top panel, down light.



MDFJ-514

◆ Mirror st./st. frame with acrylic top panel, down light.



MDFJ-519

◆ Baked enamel with acrylic top panel, down light.



MDFJ-520

◆ Baked enamel with acrylic top panel, down light.



MDFJ-515

◆ Mirror st./st. frame with acrylic top panel, down light.



MDFJ-516

◆ Mirror st./st. frame with acrylic top panel, down light.



MDFJ-521

◆ Baked enamel with acrylic top panel, down light.



MDFJ-522

◆ Baked enamel with acrylic top panel, down light.



MDFJ-517

◆ Mirror st./st. frame with acrylic top panel, down light.



MDFJ-518

◆ Mirror st./st. frame with acrylic top panel.



MDFJ-523

◆ Baked enamel with acrylic top panel, down light.



MDFJ-524

◆ Baked enamel with acrylic top panel, down light.

OPTIONAL HANDRAIL

Our company has designed stainless steel circle, ellipse, square tube, Ti-plating tube, wood hairline sheet, stainless sheet, perspex stick handrails, beautifully shaped, complete in size, according to the features of different car decoration. The customers may choose different combination as they like.



MDFJ-701 Round Rail of St./St. Φ51*1000



MDFJ-702 Round Rail of Golden St./St. Φ51*1000



MDFJ-703 Round Rail of St./St. Φ38*1000



MDFJ-704 Round Rail of Golden St./St. Φ38*1000



MDFJ-705 Round Rail of St./St. Φ25.4*1000



MDFJ-706 Round Rail of Golden St./St. Φ25.4*1000



MDFJ-707 Round Rail of Golden St./St. with Acrylic. Φ51*1000



MDFJ-708 Round Rail of Golden St./St. with wood. Φ51*1000



MDFJ-709 Round Rail of Golden St./St. with wood. Φ51*1000



MDFJ-710 Round Rail of Golden St./St. with Acrylic. Φ51*1000



MDFJ-711 Flat Rail of St./St. 80*1000



MDFJ-712 Flat Rail of Golden St./St. 80*1000



MDFJ-713 Flat Rail of Golden St./St. 80*1000



MDFJ-714 Flat Rail of St./St. 80*1000



MDFJ-715 Flat Rail of Golden St./St. 80*1000



MDFJ-716 Flat Rail of St./St. 80*1000



MDFJ-717 Round Rail of Wood. Φ51*1000



MDFJ-718 Round Rail of Marble. Φ51*1000



MDFJ-719 Round Rail of Golden St./St. with Wood. Φ51*1000

OPTIONAL FLOOR


The decoration of car floor is made up of 2mm thick patch up design PVC marble-line floor, which is light and convenient installation. The wonderful and noble colors of the PVC are the same as that of real marble.



MDFJ-601



MDFJ-602



MDFJ-603



MDFJ-604



MDFJ-605



MDFJ-606



MDFJ-607



MDFJ-608



MDFJ-609



MDFJ-610



MDFJ-611



MDFJ-612




MDFJ-613




MDFJ-614


OPTIONAL FLOOR



MDFJ-615




MDFJ-616




MDFJ-621




MDFJ-622



MDFJ-617




MDFJ-618



MDFJ-623



MDFJ-624



MDFJ-619



MDFJ-620



MDFJ-625




MDFJ-626

OPTIONAL FLOOR



MDFJ-627




MDFJ-628




MDFJ-629



MDFJ-630



MDFJ-631



MDFJ-632


FRAME SHAFT

Elegant style, easy and quick installation. In the case where the customer does not provide a reserved shaft, we can provide a variety of metal frame to install elevators, customers can choose different materials according to preferences and floor decoration style.

Aluminium Shaft Frame



Champaign Gold
P001



Rose Gold
P002




White
P003




Frosted Black
P004

Tempered Glass



Transparent
G001




Smoky Gray
G002



CONSTRUCTION LAYOUT AND SPECIFICATIONS


P10 MR Passenger Elevator

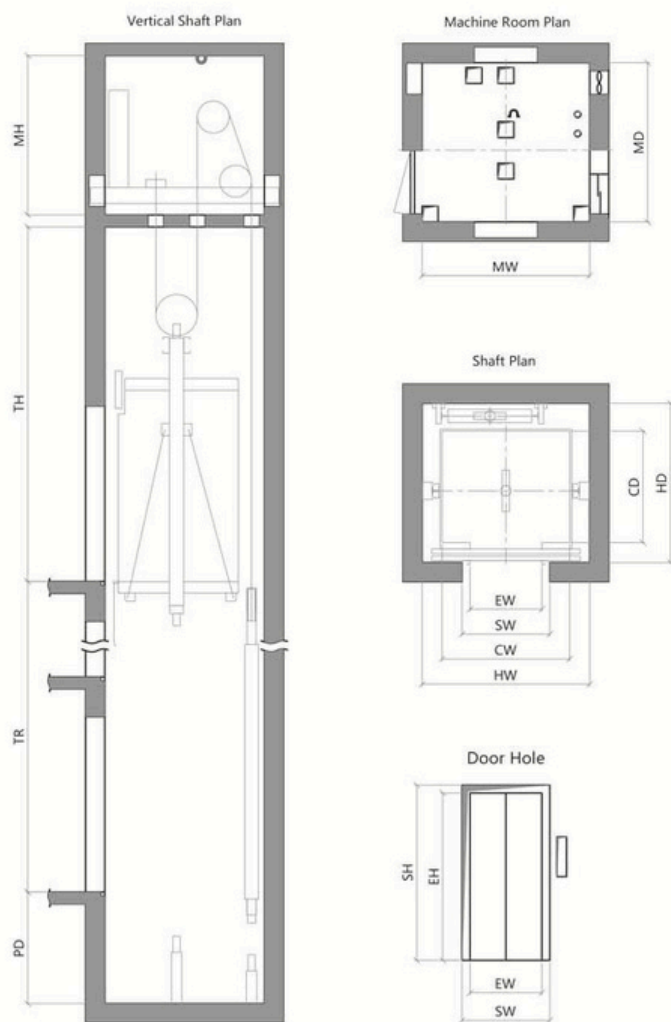

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
450	1	P10-450/100	3.3	10	50	18	1100×1100	700×2100	Center	1600×1700	1400	4450
	1.5	P10-450/150	4.9	14	75	28						4500
630	1	P10-630/100	4.2	12	50	18	1400×1100	800×2100	Center	1900×1700	1400	4450
	1.5	P10-630/150	6.3	18	75	28						4500
	1.75	P10-630/175	7.3	19	90	32						4600
630	1	P10-630/100	4.3	12	50	18	1100×1400	800×2100	2-Center	2000×1900	1400	4450
	1.5	P10-630/150	6.3	18	75	28						4500
	1.75	P10-630/175	7.3	19	90	32						4600
800	1	P10-800/100	5.3	15	50	18	1400×1350	800×2100	Center	1900×1950	1400	4450
	1.5	P10-800/150	8	22	75	28						4500
	1.75	P10-800/175	9.3	24	90	32						4600
800	1	P10-800/100	5.3	15	50	18	1350×1400	800×2100	2-Center	2200×1900	1400	4450
	1.5	P10-800/150	8	22	75	28						4500
	1.75	P10-800/175	9.3	24	90	32						4600
1000	1	P10-1000/100	6.5	18	50	18	1600×1400	900×2100	Center	2100×2000	1400	4450
	1.5	P10-1000/150	9.8	26	75	28						4500
	1.75	P10-1000/175	11.4	28	90	32						4600
1000	1	P10-1000/100	6.5	18	50	18	1400×1600	900×2100	2-Center	2300×2100	1400	4450
	1.5	P10-1000/150	9.8	26	75	28						4500
	1.75	P10-1000/175	11.4	28	90	32						4600
1000	1	P10-1000/100	6.5	18	50	18	1100×2100	900×2100	Side	1850×2550	1400	4450
	1.5	P10-1000/150	9.8	26	75	28						4500
	1.75	P10-1000/175	11.4	28	90	32						4600
1000	1	P10-1000/100	6.5	18	50	18	1100×2100	900×2100	Center	2050×2500	1400	4450
	1.5	P10-1000/150	9.8	26	75	28						4500
	1.75	P10-1000/175	11.4	28	90	32						4600
1000	2	P10-1000/200	13.1	33	100	36	1600×1400	900×2100	Center	2200×2200	1550	4700
1000	2.5	P10-1000/250	15.5	37	125	45	1600×1400	900×2100	Center	2200×2200	1800	4950
1000	2.5	P10-1000/250	15.5	37	125	45	1100×2100	900×2100	Side	2000×2550	1800	4950
1150	1	P10-1150/100	7.6	20	50	18	1800×1400	1000×2100	Center	2300×2100	1400	4450
	1.5	P10-1150/150	11.4	29	75	28						4500
	1.75	P10-1150/175	13.5	34	90	32						4600
1250	1	P10-1250/100	8.2	21	50	18	1900×1500	1100×2100	Center	2400×2200	1400	4450
	1.5	P10-1250/150	12.2	32	75	28						4500
	1.75	P10-1250/175	14.3	35	90	32						4600
1350	1	P10-1350/100	8.9	22	50	18	1900×1600	1100×2100	Center	2400×2300	1400	4450
	1.5	P10-1350/150	13.2	35	75	28						4500
	1.75	P10-1350/175	15.5	37	90	32						4600
1600	1	P10-1600/100	10.5	26	50	18	2000×1700	1100×2100	Center	2500×2400	1400	4450
	1.5	P10-1600/150	15.7	41	75	28						4500
	1.75	P10-1600/175	18.4	44	90	32					1450	4600

CONSTRUCTION LAYOUT AND SPECIFICATIONS


P20 MRL Passenger Elevator

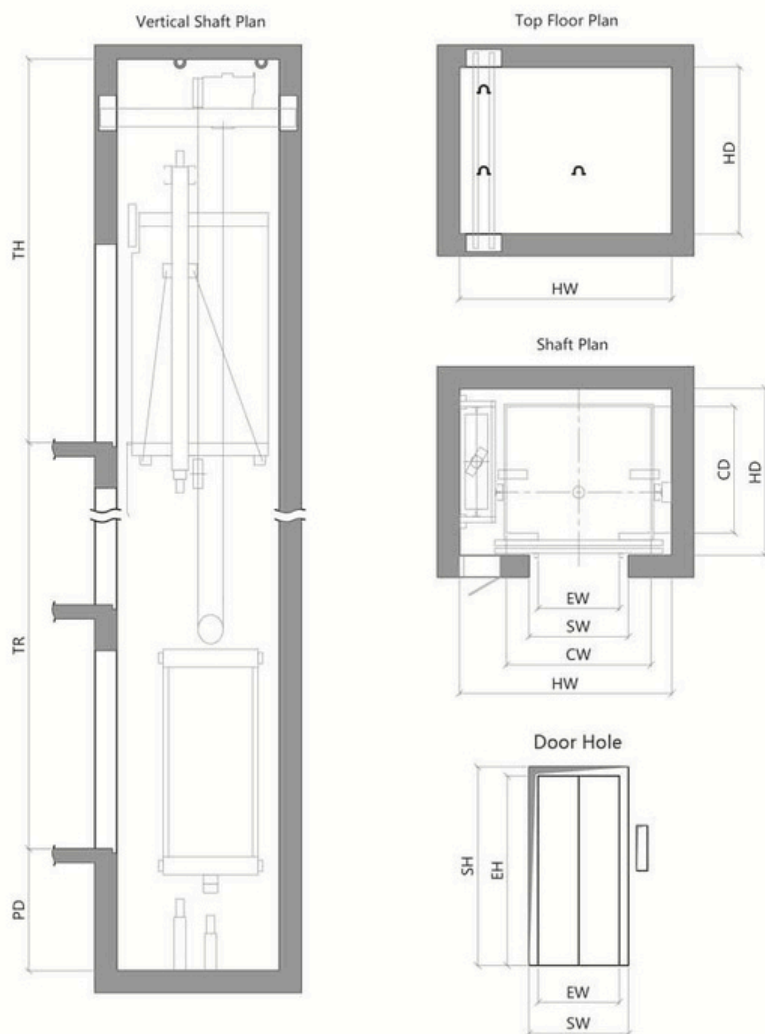

Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
450	1	P20-450/100	3.3	10	50	18	1100×1100	700×2100	Center	1850×1500	1500	4250
	1.5	P20-450/150	4.9	14	75	28						4350
630	1	P20-630/100	4.2	12	50	18	1100×1400	700×2100	Center	1850×1850	1500	4250
	1.5	P20-630/150	6.3	18	75	28					1550	4350
	1.75	P20-630/175	7.3	19	90	32					1600	4400
800	1	P20-800/100	5.3	15	50	18	1350×1400	800×2100	Center	2100×1850	1500	4250
	1.5	P20-800/150	8	22	75	28					1550	4350
	1.75	P20-800/175	9.3	24	90	32					1600	4400
1000	1	P20-1000/100	6.5	18	50	18	1600×1400	900×2100	Center	2350×1850	1500	4250
	1.5	P20-1000/150	9.8	26	75	28					1550	4350
	1.75	P20-1000/175	11.4	28	90	32					1600	4400
1000	1	P20-1000/100	6.5	18	50	18	1600×1400	900×2100	2-Center	2350×1900	1500	4250
	1.5	P20-1000/150	9.8	26	75	28					1550	4350
	1.75	P20-1000/175	11.4	28	90	32					1600	4400
1000	1	P20-1000/100	6.5	18	50	18	1100×2100	900×2100	Side	1850×2550	1500	4250
	1.5	P20-1000/150	9.8	26	75	28					1550	4350
	1.75	P20-1000/175	11.4	28	90	32					1600	4400
1000	1	P20-1000/100	6.5	18	50	18	1100×2100	900×2100	Center	2100×2500	1500	4250
	1.5	P20-1000/150	9.8	26	75	28					1550	4350
	1.75	P20-1000/175	11.4	28	90	32					1600	4400
1150	1	P20-1150/100	7.6	20	50	18	1800×1400	1100×2100	Center	2700×1800	1500	4250
	1.5	P20-1150/150	11.4	29	75	28					1550	4350
	1.75	P20-1150/175	13.5	34	90	32					1600	4400
1250	1	P20-1250/100	8.2	21	50	18	1900×1500	1100×2100	Center	2800×1900	1500	4250
	1.5	P20-1250/150	12.2	32	75	28					1550	4350
	1.75	P20-1250/175	14.3	35	90	32					1600	4400
1350	1	P20-1350/100	8.9	22	50	18	1900×1600	1100×2100	Center	2800×2000	1500	4250
	1.5	P20-1350/150	13.2	35	75	28					1550	4350
	1.75	P20-1350/175	15.5	37	90	32					1600	4400
1600	1	P20-1600/100	10.5	26	50	18	2000×1800	1100×2100	Center	2900×2200	1500	4250
	1.5	P20-1600/150	15.7	41	75	28					1550	4350
	1.75	P20-1600/175	18.4	44	90	32					1600	4400

CONSTRUCTION LAYOUT AND SPECIFICATIONS

P11 MR Hospital Elevator

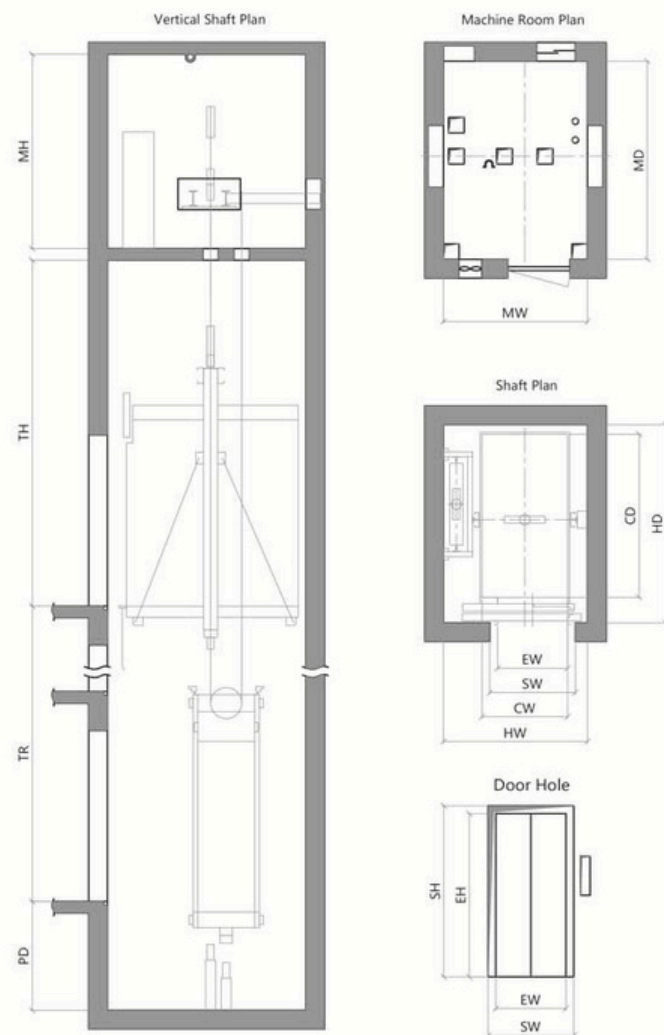

MOARK
ascensores


FUJI
MODERN FUJI

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
1600	1	P11-1600/100	10.5	26	50	18	1400×2400	1200×2100	Side	2300×2900	1400	4450
	1.5	P11-1600/150	15.7	41	75	28	1400×2400	1200×2100	Side	2300×2900	1450	4500
1600	1	P11-1600/100	10.5	26	50	18	1400×2400	1200×2100	2-Side	2300×3050	1400	4450
	1.5	P11-1600/150	15.7	41	75	28	1400×2400	1200×2100	2-Side	2300×3050	1450	4500
1600	1	P11-1600/100	10.5	26	50	18	1400×2400	1200×2100	Center	2600×2800	1400	4450
	1.5	P11-1600/150	15.7	41	75	28	1400×2400	1200×2100	Center	2600×2800	1450	4500
1600	1	P11-1600/100	10.5	26	50	18	1400×2400	1200×2100	2-Center	2600×2900	1400	4450
	1.5	P11-1600/150	15.7	41	75	28	1400×2400	1200×2100	2-Center	2600×2900	1450	4500
1600	1.75	P11-1600/175	18.4	44	90	32	1400×2400	1200×2100	Side	2300×2900	1450	4600
1600	1.75	P11-1600/175	18.4	44	90	32	1400×2400	1200×2100	2-Side	2300×3050	1450	4600
1600	1.75	P11-1600/175	18.4	44	90	32	1400×2400	1200×2100	Center	2600×2800	1450	4600
1600	1.75	P11-1600/175	18.4	44	90	32	1400×2400	1200×2100	2-Center	2600×2900	1450	4600
1600	2	P11-1600/200	21	50	100	36	1400×2400	1200×2100	Side	2300×2900	1550	4700
1600	2	P11-1600/200	18.4	44	90	32	1400×2400	1200×2100	2-Side	2300×3050	1550	4700
1600	2	P11-1600/200	18.4	44	90	32	1400×2400	1200×2100	Center	2600×2800	1550	4700
1600	2	P11-1600/200	18.4	44	90	32	1400×2400	1200×2100	2-Center	2600×2900	1550	4700



CONSTRUCTION LAYOUT AND SPECIFICATIONS

P21 MRL Hospital Elevator

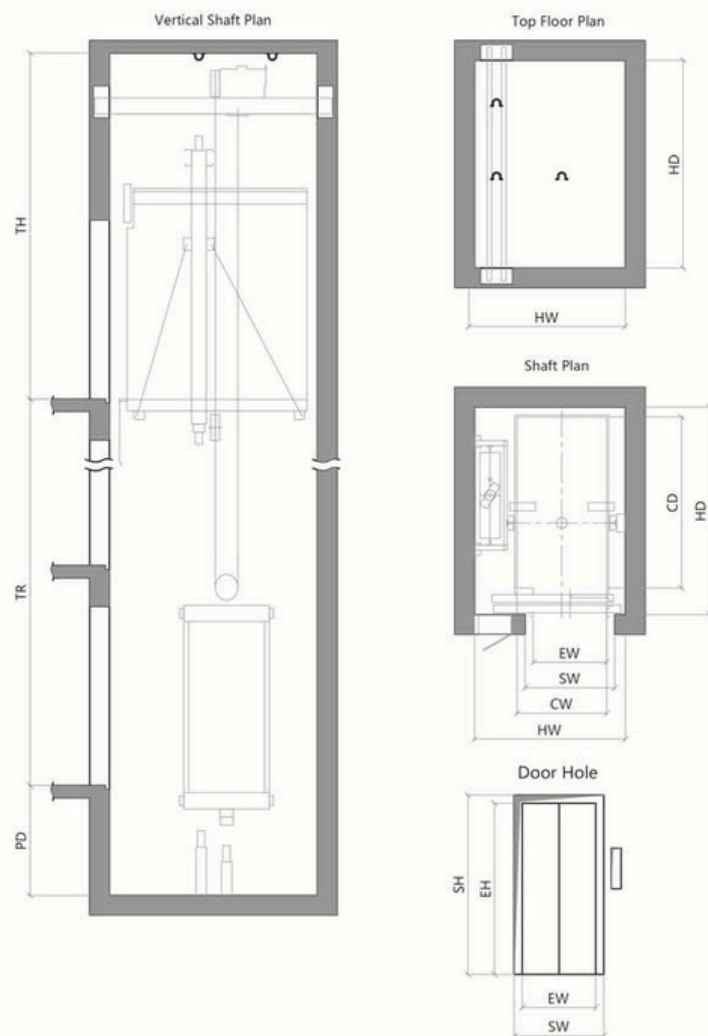


Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
1600	1	P21-1600/100	10.5	26	50	18	1400×2400	1200×2100	Side	2300×2900	1500	4350
	1.5	P21-1600/150	15.7	41	75	28						1550
	1.75	P21-1600/175	18.4	44	90	32						1600
1600	1	P21-1600/100	10.5	26	50	18	1400×2400	1200×2100	2-Side	2300×3050	1500	4350
	1.5	P21-1600/150	15.7	41	75	28						1550
	1.75	P21-1600/175	18.4	44	90	32						1600
1600	1	P21-1600/100	10.5	26	50	18	1400×2400	1200×2100	Center	2650×2800	1500	4350
	1.5	P21-1600/150	15.7	41	75	28						1550
	1.75	P21-1600/175	18.4	44	90	32						1600
1600	1	P21-1600/100	10.5	26	50	18	1400×2400	1200×2100	2-Center	2650×2900	1500	4350
	1.5	P21-1600/150	15.7	41	75	28						1550
	1.75	P21-1600/175	18.4	44	90	32						1600



CONSTRUCTION LAYOUT AND SPECIFICATIONS


P21 MRL Hospital Elevator

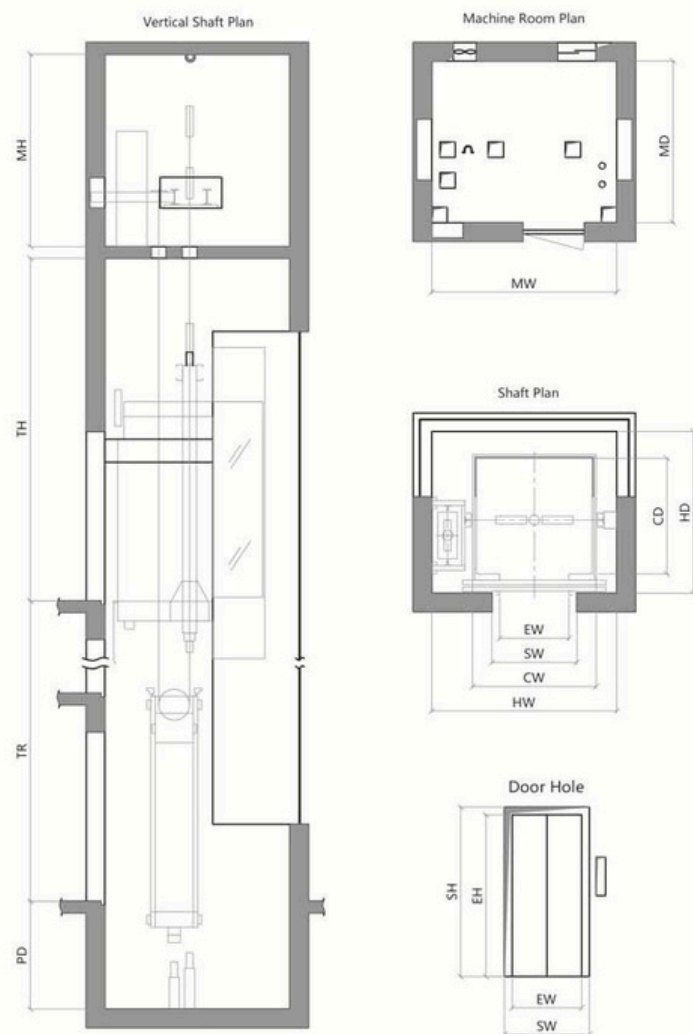

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH Capella	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
630	1	P12-630/100	4.3	12	50	18					1800	4550	
	1.5	P12-630/150	6.3	18	75	28	1100×1400	700×2100	Center	2000×2000	1850	4600	Square
	1.75	P12-630/175	7.3	19	90	32					1900	4650	
800	1	P12-800/100	5.3	15	50	18					1800	4600	
	1.5	P12-800/150	8	22	75	28	1300×1500	800×2100	Center	2200×2100	1850	4650	Square
	1.75	P12-800/175	9.3	24	90	32					1900	4700	
1000	1	P12-1000/100	6.5	18	50	18					1900	4650	
	1.5	P12-1000/150	9.8	26	75	28	1500×1500	900×2100	Center	2400×2100	1950	4700	Square
	1.75	P12-1000/175	11.4	28	90	32					2000	4750	
1000	1	P12-1000/100	6.5	18	50	18					1900	4650	Square Steel Shaft
	1.5	P12-1000/150	9.8	26	75	28	1500×1500	900×2100	Center	2400×2100	1950	4700	
	1.75	P12-1000/175	11.4	28	90	32					2000	4750	
1250	1	P12-1350/100	8.2	21	50	18					2000	4750	
	1.5	P12-1350/150	12.2	32	75	28	1600×1700	1000×2100	Center	2500×2300	2050	4800	Square
	1.75	P12-1350/175	14.3	35	90	32					2100	4850	
1350	1	P12-1350/100	8.9	22	50	18					2050	4800	
	1.5	P12-1350/150	13.2	35	75	28	1800×1700	1100×2100	Center	2700×2300	2100	4850	Square
	1.75	P12-1350/175	15.5	37	90	32					2150	4900	
1600	1	P12-1600/100	10.5	26	50	18					2150	4900	
	1.5	P12-1600/150	15.7	41	75	28	1900×1800	1100×2100	Center	2900×2400	2200	4950	Square
	1.75	P12-1600/175	18.4	44	90	32					2250	5000	

CONSTRUCTION LAYOUT AND SPECIFICATIONS


P21 MRL Hospital Elevator

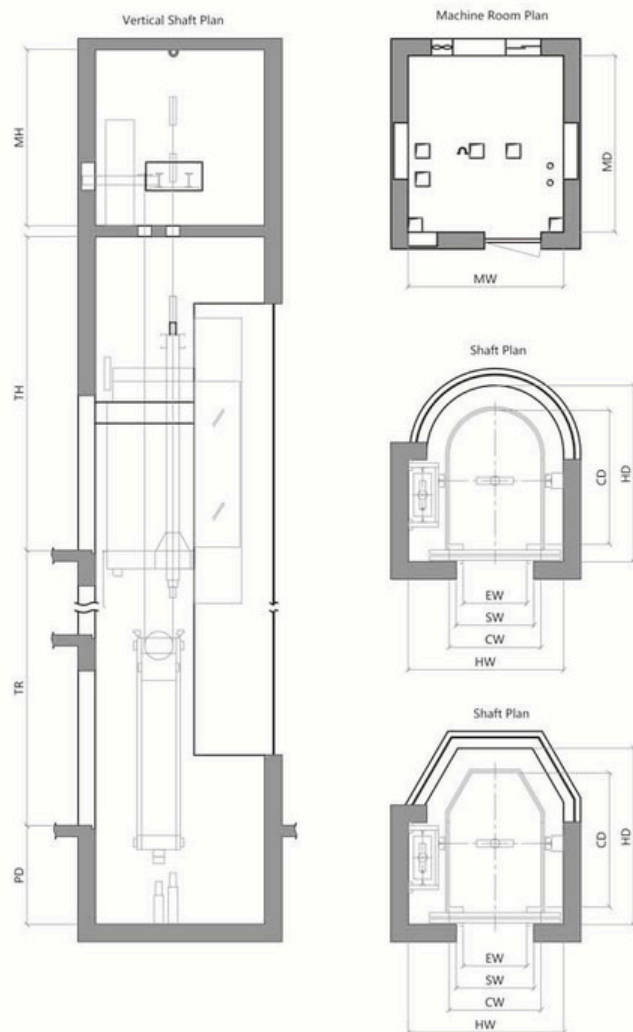


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Standard TH	Remark
kg	m/s		kW	A	m		CW x CD	EW x EH		HW x HD	PD(mm)	TH(mm)	TH(mm)	
630	1	P12-630/100	4.3	12	50	18	1100x1600	700x2100	Center	2000x2200	1800	4550	1850	Semicircle
	1.5	P12-630/150	6.3	18	75	28						4600		
	1.75	P12-630/175	7.3	19	90	32						1900	4650	
630	1	P12-630/100	4.3	12	50	18	1100x1600	700x2100	Center	2000x2200	1800	4550	1850	Six angles
	1.5	P12-630/150	6.3	18	75	28						4600		
	1.75	P12-630/175	7.3	19	90	32						1900	4650	
800	1	P12-800/100	5.3	15	50	18	1200x1750	800x2100	Center	2100x2350	1800	4600	1850	Semicircle
	1.5	P12-800/150	8	22	75	28						4650		
	1.75	P12-800/175	9.3	24	90	32						1900	4700	
800	1	P12-800/100	5.3	15	50	18	1200x1750	800x2100	Center	2100x2350	1800	4600	1850	Six angles
	1.5	P12-800/150	8	22	75	28						4650		
	1.75	P12-800/175	9.3	24	90	32						1900	4700	
1000	1	P12-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1900	4650	1950	Semicircle
	1.5	P12-1000/150	9.8	26	75	28						4700		
	1.75	P12-1000/175	11.4	28	90	32						2000	4750	
1000	1	P12-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1900	4650	1950	Six angles
	1.5	P12-1000/150	9.8	26	75	28						4700		
	1.75	P12-1000/175	11.4	28	90	32						2000	4750	
1000	1	P12-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1900	4650	1950	Semicircle Steel Shaft
	1.5	P12-1000/150	9.8	26	75	28						4700		
	1.75	P12-1000/175	11.4	28	90	32						2000	4750	
1000	1	P12-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1900	4650	1950	Six angles Steel Shaft
	1.5	P12-1000/150	9.8	26	75	28						4700		
	1.75	P12-1000/175	11.4	28	90	32						2000	4750	
1250	1	P12-1350/100	8.2	21	50	18	1500x2000	900x2100	Center	2400x2600	2000	4750	2050	Semicircle
	1.5	P12-1350/150	12.2	32	75	28						4800		
	1.75	P12-1350/175	14.3	35	90	32						2100	4850	
1250	1	P12-1350/100	8.2	21	50	18	1500x2000	900x2100	Center	2400x2600	2000	4750	2050	Six angles
	1.5	P12-1350/150	12.2	32	75	28						4800		
	1.75	P12-1350/175	14.3	35	90	32						2100	4850	
1350	1	P12-1350/100	8.9	22	50	18	1600x2000	1000x2100	Center	2500x2600	2050	4800	2100	Semicircle
	1.5	P12-1350/150	13.2	35	75	28						4850		
	1.75	P12-1350/175	15.5	37	90	32						2150	4900	
1350	1	P12-1350/100	8.9	22	50	18	1600x2000	1000x2100	Center	2500x2600	2050	4800	2100	Six angles
	1.5	P12-1350/150	13.2	35	75	28						4850		
	1.75	P12-1350/175	15.5	37	90	32						2150	4900	
1600	1	P12-1600/100	10.5	26	50	18	1800x2100	1000x2100	Center	2800x2700	2150	4900	2200	Semicircle
	1.5	P12-1600/150	15.7	41	75	28						4950		
	1.75	P12-1600/175	18.4	44	90	32						2250	5000	
1600	1	P12-1600/100	10.5	26	50	18	1800x2100	1000x2100	Center	2800x2700	2150	4900	2200	Six angles
	1.5	P12-1600/150	15.7	41	75	28						4950		
	1.75	P12-1600/175	18.4	44	90	32						2250	5000	

CONSTRUCTION LAYOUT AND SPECIFICATIONS

P22 MRL Observation Elevator

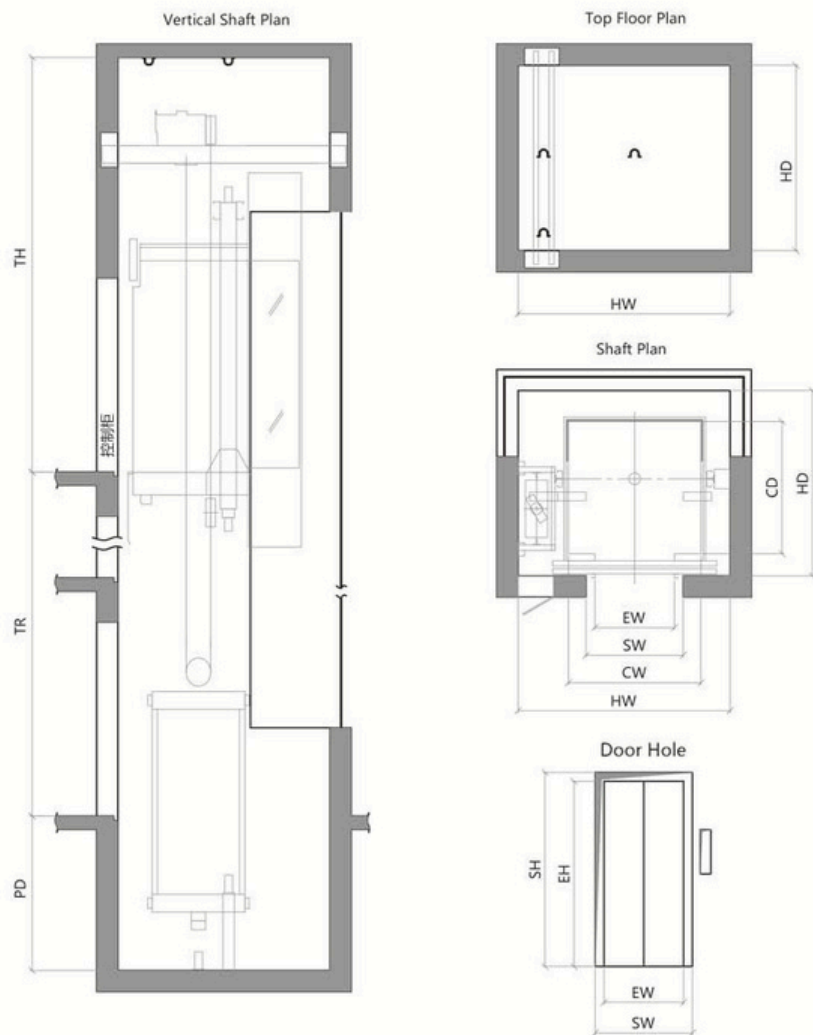


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	TH(mm)	
630	1	P22-630/100	4.2	12	50	18	1100×1400	700×2100	Center	2000×2000	1500	4250	4350	Square
	1.5	P22-630/150	6.3	18	75	28						1550		
	1.75	P22-630/175	7.3	19	90	32						1600	4400	
800	1	P22-800/100	5.3	15	50	18	1300×1500	800×2100	Center	2200×2100	1500	4250	4350	Square
	1.5	P22-800/150	8	22	75	28						1550		
	1.75	P22-800/175	9.3	24	90	32						1600	4400	
1000	1	P22-1000/100	6.5	18	50	18	1500×1500	900×2100	Center	2400×2100	1500	4250	4350	Square
	1.5	P22-1000/150	9.8	26	75	28						1550		
	1.75	P22-1000/175	11.4	28	90	32						1600	4400	
1000	1	P22-1000/100	6.5	18	50	18	1500×1500	900×2100	Center	2400×2100	1500	4250	4350	Square Steel Shaft
	1.5	P22-1000/150	9.8	26	75	28						1550		
	1.75	P22-1000/175	11.4	28	90	32						1600	4400	
1250	1	P22-1250/100	8.2	21	50	18	1600×1700	1000×2100	Center	2500×2300	1500	4250	4350	Square
	1.5	P22-1250/150	12.2	32	75	28						1550		
	1.75	P22-1250/175	14.3	35	90	32						1600	4400	
1600	1	P22-1600/100	10.5	26	50	18	1900×1800	1100×2100	Center	2900×2400	1500	4250	4350	Square
	1.5	P22-1600/150	15.7	41	75	28						1550		
	1.75	P22-1600/175	18.4	44	90	32						1600	4400	

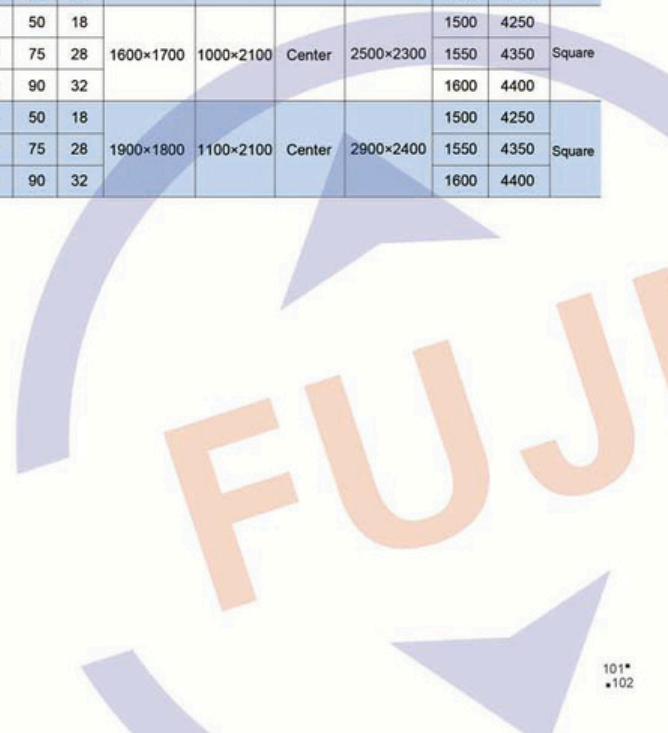

101*
•102

CONSTRUCTION LAYOUT AND SPECIFICATIONS


P22 MRL Observation Elevator

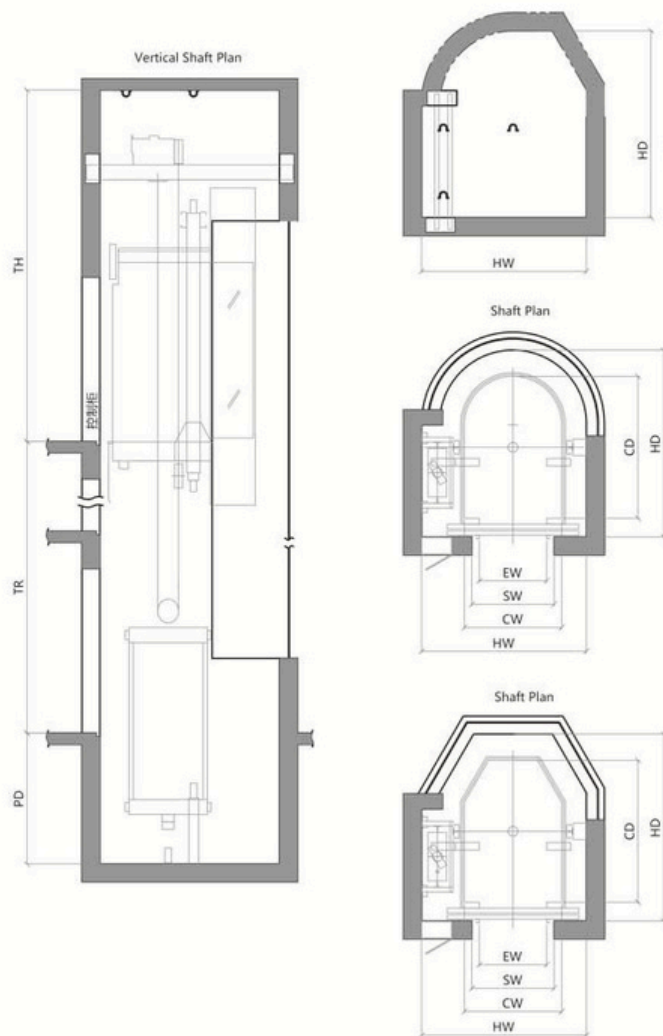

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Standard TH	Remark
kg	m/s		kW	A	m		CW x CD	EW x EH		HW x HD	PD(mm)	TH(mm)	TH(mm)	
630	1	P22-630/100	4.2	12	50	18	1100x1600	700x2100	Center	2000x2200	1500	4250	4350	Semicircle
	1.5	P22-630/150	6.3	18	75	28						1550	4350	
	1.75	P22-630/175	7.3	19	90	32						1600	4400	
630	1	P22-630/100	4.2	12	50	18	1100x1600	700x2100	Center	2000x2200	1500	4250	4350	Six angles
	1.5	P22-630/150	6.3	18	75	28						1550	4350	
	1.75	P22-630/175	7.3	19	90	32						1600	4400	
800	1	P22-800/100	5.3	15	50	18	1200x1750	800x2100	Center	2100x2350	1500	4250	4350	Semicircle
	1.5	P22-800/150	8	22	75	28						1550	4350	
	1.75	P22-800/175	9.3	24	90	32						1600	4400	
800	1	P22-800/100	5.3	15	50	18	1200x1750	800x2100	Center	2100x2350	1500	4250	4350	Six angles
	1.5	P22-800/150	8	22	75	28						1550	4350	
	1.75	P22-800/175	9.3	24	90	32						1600	4400	
1000	1	P22-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1500	4250	4350	Semicircle
	1.5	P22-1000/150	9.8	26	75	28						1550	4350	
	1.75	P22-1000/175	11.4	28	90	32						1600	4400	
1000	1	P22-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1500	4250	4350	Six angles
	1.5	P22-1000/150	9.8	26	75	28						1550	4350	
	1.75	P22-1000/175	11.4	28	90	32						1600	4400	
1000	1	P22-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1500	4250	4350	Semicircle Steel Shaft
	1.5	P22-1000/150	9.8	26	75	28						1550	4350	
	1.75	P22-1000/175	11.4	28	90	32						1600	4400	
1000	1	P22-1000/100	6.5	18	50	18	1300x1900	900x2100	Center	2200x2500	1500	4250	4350	Six angles Steel Shaft
	1.5	P22-1000/150	9.8	26	75	28						1550	4350	
	1.75	P22-1000/175	11.4	28	90	32						1600	4400	
1250	1	P22-1250/100	8.2	21	50	18	1500x2000	1000x2100	Center	2400x2600	1500	4250	4350	Semicircle
	1.5	P22-1250/150	12.2	32	75	28						1550	4350	
	1.75	P22-1250/175	14.3	35	90	32						1600	4400	
1250	1	P22-1250/100	8.2	21	50	18	1500x2000	1000x2100	Center	2400x2600	1500	4250	4350	Six angles
	1.5	P22-1250/150	12.2	32	75	28						1550	4350	
	1.75	P22-1250/175	14.3	35	90	32						1600	4400	
1600	1	P22-1600/100	10.5	26	50	18	1800x2100	1000x2100	Center	2800x2700	1500	4250	4350	Semicircle
	1.5	P22-1600/150	15.7	41	75	28						1550	4350	
	1.75	P22-1600/175	18.4	44	90	32						1600	4400	
1600	1	P22-1600/100	10.5	26	50	18	1800x2100	1000x2100	Center	2800x2700	1500	4250	4350	Six angles
	1.5	P22-1600/150	15.7	41	75	28						1550	4350	
	1.75	P22-1600/175	18.4	44	90	32						1600	4400	

CONSTRUCTION LAYOUT AND SPECIFICATIONS


P30 MRL Passenger Elevator

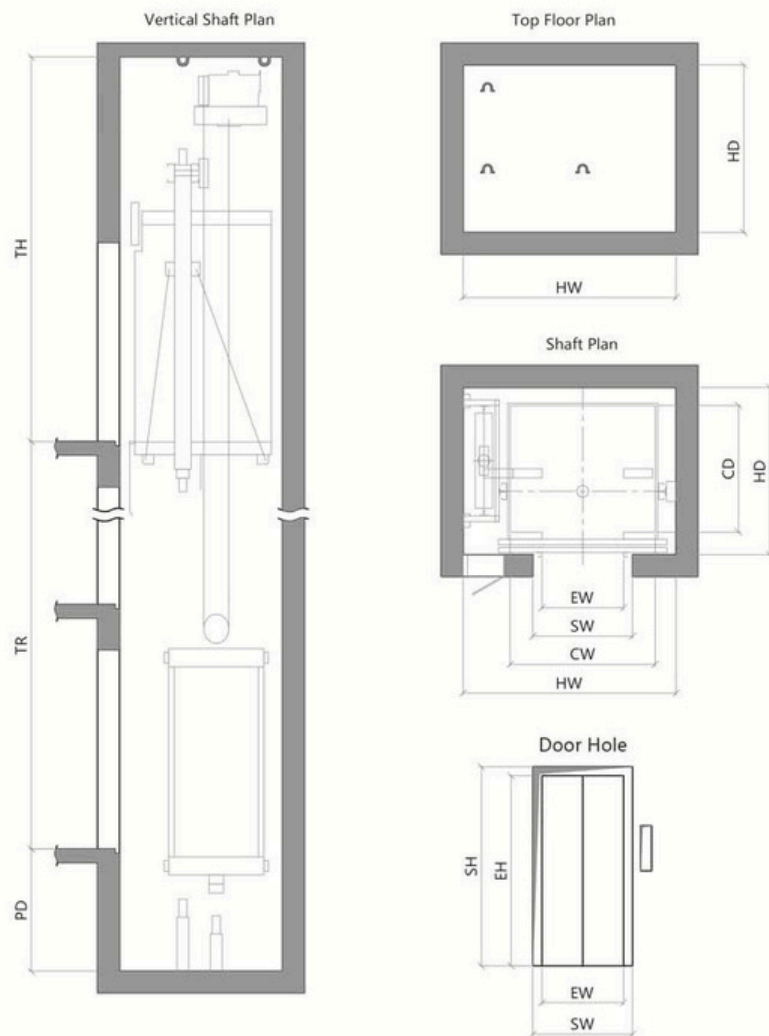

Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standart Pit	Standart TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
400	1	P30-400/100	3.3	8	50	18	1000×1000	800×2100	Side	1550×1500	1200	3950
	1.5	P30-400/150	4.9	14	75	28					1300	4150
	1.75	P30-400/175	5.7	15	90	32					1300	4150
400	1	P30-400/100	3.3	8	50	18	1000×1000	700×2100	Center	1550×1400	1200	3950
	1.5	P30-400/150	4.9	14	75	28					1300	4150
	1.75	P30-400/175	5.7	15	90	32					1300	4150
450	1	P30-450/100	3.3	8	50	18	1100×1100	800×2100	Side	1650×1550	1200	3950
	1.5	P30-450/150	4.9	14	75	28					1300	4150
	1.75	P30-450/175	5.7	15	90	32					1300	4150
450	1	P30-450/100	3.3	8	50	18	1100×1100	700×2100	Center	1650×1450	1200	3950
	1.5	P30-450/150	4.9	14	75	28					1300	4150
	1.75	P30-450/175	5.7	15	90	32					1300	4150
630	1	P30-630/100	4.2	12	50	18	1100×1400	900×2100	Side	1650×1800	1200	3950
	1.5	P30-630/150	6.3	18	75	28					1300	4150
	1.75	P30-630/175	7.3	19	90	32					1300	4150
630	1	P30-630/100	4.2	12	50	18	1100×1400	700×2100	Center	1650×1700	1200	3950
	1.5	P30-630/150	6.3	18	75	28					1300	4150
	1.75	P30-630/175	7.3	19	90	32					1300	4150
800	1	P30-800/100	5.3	15	50	18	1350×1400	800×2100	Center	1900×1700	1200	3950
	1.5	P30-800/150	8	22	75	28					1300	4150
	1.75	P30-800/175	9.3	24	90	32					1300	4150
1000	1	P30-1000/100	6.5	18	50	18	1600×1400	1000×2100	Center	2150×1750	1200	3950
	1.5	P30-1000/150	9.8	26	75	28					1300	4150
	1.75	P30-1000/175	11.4	28	90	32					1300	4150
1000	1	P30-1000/100	6.5	18	50	18	2100×1100	1200×2100	Side	2650×1650	1200	3950
	1.5	P30-1000/150	9.8	26	75	28					1300	4150
	1.75	P30-1000/175	11.4	28	90	32					1300	4150
1000	1	P30-1000/100	6.5	18	50	18	1100×2100	900×2100	Side	1650×2500	1200	3950
	1.5	P30-1000/150	9.8	26	75	28					1300	4150
	1.75	P30-1000/175	11.4	28	90	32					1300	4150
1000	1	P30-1000/100	6.5	18	50	18	1100×2100	800×2100	Center	1800×2400	1200	3950
	1.5	P30-1000/150	9.8	26	75	28					1300	4150
	1.75	P30-1000/175	11.4	28	90	32					1300	4150

CONSTRUCTION LAYOUT AND SPECIFICATIONS


P31 MRLSP Passenger Elevator

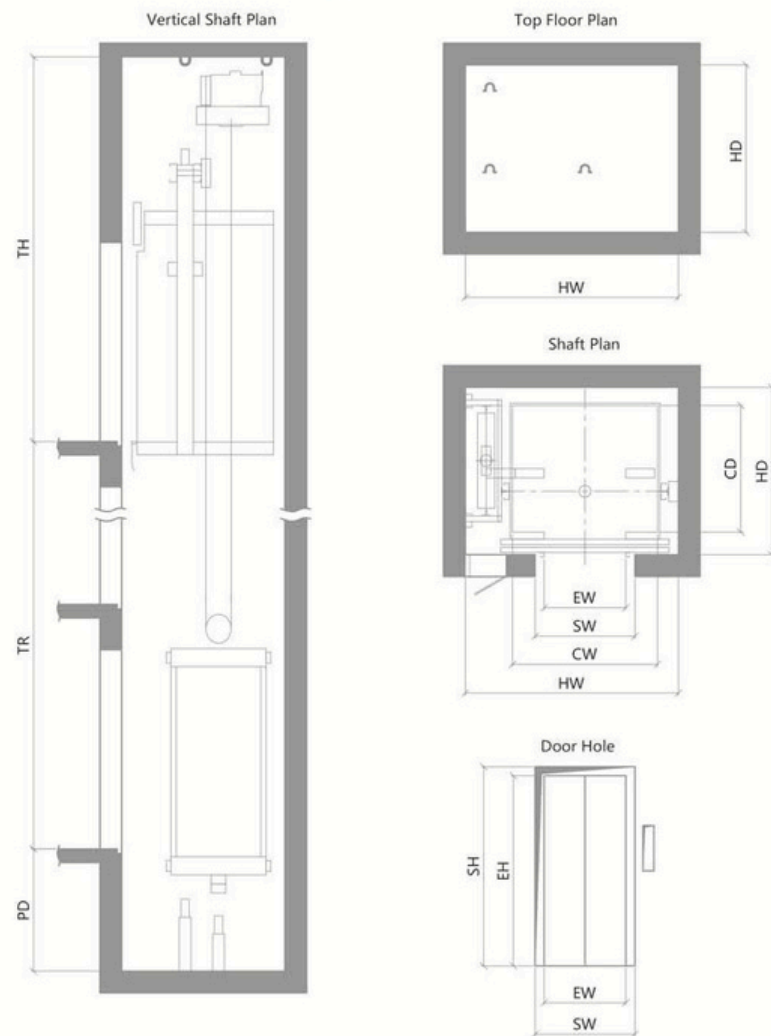

Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standart Pit	Standard TH
kg	m/s		kW	A	m		CW x CD	EW x EH		HW x HD	PD(mm)	TH(mm)
400	1	P31-400/100	3.3	8	50	18	1000x1000	800x2100	Side	1550x1500	1200	3900
	1.5	P31-400/150	4.9	14	75	28					1300	4000
	1.75	P31-400/175	5.7	15	90	32					1400	4100
400	1	P31-400/100	3.3	8	50	18	1000x1000	700x2100	Center	1550x1400	1200	3900
	1.5	P31-400/150	4.9	14	75	28					1300	4000
	1.75	P31-400/175	5.7	15	90	32					1400	4100
450	1	P31-450/100	3.3	8	50	18	1100x1100	800x2100	Side	1650x1550	1200	3900
	1.5	P31-450/150	4.9	14	75	28					1300	4000
	1.75	P31-450/175	5.7	15	90	32					1400	4100
450	1	P31-450/100	3.3	8	50	18	1100x1100	700x2100	Center	1650x1450	1200	3900
	1.5	P31-450/150	4.9	14	75	28					1300	4000
	1.75	P31-450/175	5.7	15	90	32					1400	4100
630	1	P31-630/100	4.2	12	50	18	1100x1400	900x2100	Side	1650x1800	1200	3900
	1.5	P31-630/150	6.3	18	75	28					1300	4000
	1.75	P31-630/175	7.3	19	90	32					1400	4100
630	1	P31-630/100	4.2	12	50	18	1100x1400	700x2100	Center	1650x1700	1200	3900
	1.5	P31-630/150	6.3	18	75	28					1300	4000
	1.75	P31-630/175	7.3	19	90	32					1400	4100
800	1	P31-800/100	5.3	15	50	18	1350x1400	800x2100	Center	1900x1700	1200	3900
	1.5	P31-800/150	8	22	75	28					1300	4000
	1.75	P31-800/175	9.3	24	90	32					1400	4100
1000	1	P31-1000/100	6.5	18	50	18	1600x1400	1000x2100	Center	2150x1750	1200	3900
	1.5	P31-1000/150	9.8	26	75	28					1300	4000
	1.75	P31-1000/175	11.4	28	90	32					1400	4100
1000	1	P31-1000/100	6.5	18	50	18	2100x1100	1200x2100	Side	2650x1650	1200	3900
	1.5	P31-1000/150	9.8	26	75	28					1300	4000
	1.75	P31-1000/175	11.4	28	90	32					1400	4100
1000	1	P31-1000/100	6.5	18	50	18	1100x2100	900x2100	Side	1650x2500	1200	3900
	1.5	P31-1000/150	9.8	26	75	28					1300	4000
	1.75	P31-1000/175	11.4	28	90	32					1400	4100
1000	1	P31-1000/100	6.5	18	50	18	1100x2100	800x2100	Center	1800x2400	1200	3900
	1.5	P31-1000/150	9.8	26	75	28					1300	4000
	1.75	P31-1000/175	11.4	28	90	32					1400	4100

CONSTRUCTION LAYOUT AND SPECIFICATIONS


P32 RMRL Passenger Elevator

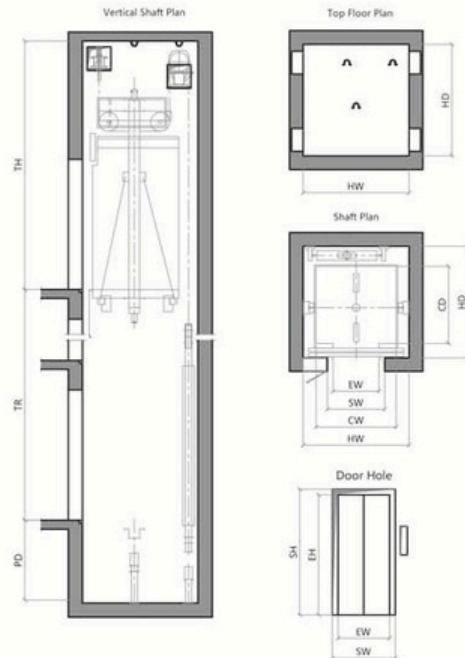

Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
450	1	P32-450/100	3.3	10	50	18	1200×1100	700×2100	Center	1650×1700	1400	4200
	1.5	P32-450/150	4.9	14	75	28						4300
630	1	P32-630/100	4.2	12	50	18	1400×1200	800×2100	Center	1850×1800	1400	4200
	1.5	P32-630/150	6.3	18	75	28					1450	4300
	1.75	P32-630/175	7.3	19	90	32					1450	4400
800	1	P32-800/100	5.3	15	50	18	1400×1350	800×2100	Center	1850×1950	1400	4200
	1.5	P32-800/150	8	22	75	28					1450	4300
	1.75	P32-800/175	9.3	24	90	32					1450	4400
1000	1	P10-1000/100	6.5	18	50	18	1600×1400	900×2100	Center	2050×2000	1400	4200
	1.5	P10-1000/150	9.8	26	75	28					1450	4300
	1.75	P10-1000/175	11.4	28	90	32					1450	4400

CONSTRUCTION LAYOUT AND SPECIFICATIONS

P50 MR Passenger Elevator

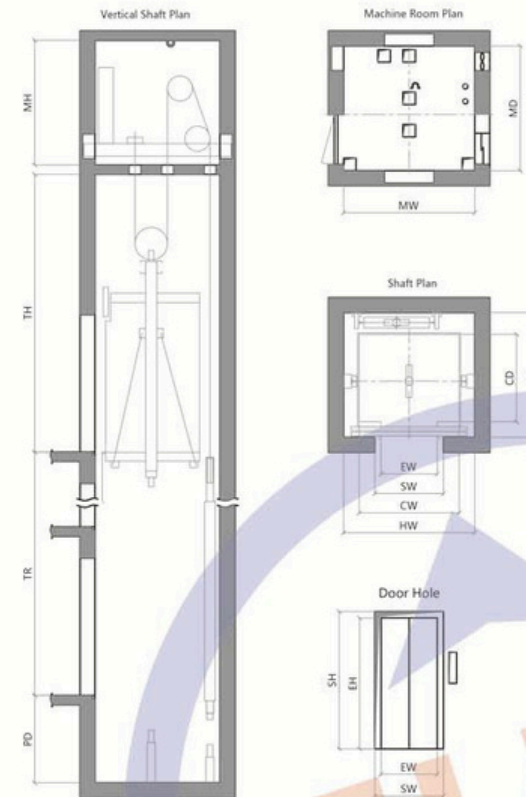


Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
450	1	P50-450/100	3.3	10	50	18	1200×1100	700×2100	Center	1650×1700	1400	4450
	1.5	P50-450/150	4.9	14	75	28						4500
630	1	P50-630/100	4.2	12	50	18	1400×1200	800×2100	Center	1850×1800	1400	4450
	1.5	P50-630/150	6.3	18	75	28					1450	4500
	1.75	P50-630/175	7.3	19	90	32					1450	4600

109*
•110

CONSTRUCTION LAYOUT AND SPECIFICATIONS

P60 MRL Passenger Elevator

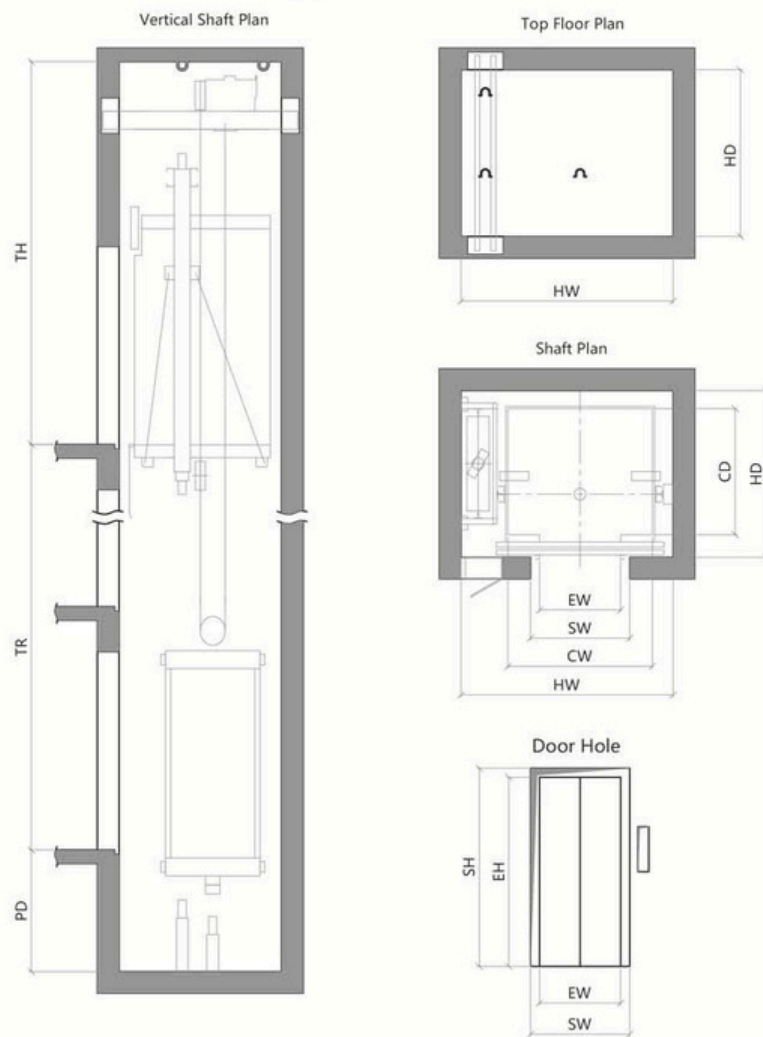


Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standart Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
450	1	P60-450/100	3.3	10	50	18	1200×1100	800×2100	Center	1950×1500	1500	4250
	1.5	P60-450/150	4.9	14	75	28						
450	1	P60-450/100	3.3	10	50	18	1000×1300	800×2100	Side	1750×1750	1500	4250
	1.5	P60-450/150	4.9	14	75	28						
* 450	1	P60-450/100	3.3	10	50	18	1200×1100	800×2100	Center	1950×1500	1500	4250
	1.5	P60-450/150	4.9	14	75	28						
* 450	1	P60-450/100	3.3	10	50	18	1000×1300	800×2100	Side	1750×1750	1500	4250
	1.5	P60-450/150	4.9	14	75	28						
630	1	P60-630/100	4.2	12	50	18	1400×1200	800×2100	Center	2150×1600	1500	4250
	1.5	P60-630/150	6.3	18	75	28						
630	1.75	P60-630/175	7.3	19	90	32	1100×1400	800×2100	Center	1850×1800	1500	4250
	1.5	P60-630/150	6.3	18	75	28						
630	1.75	P60-630/175	7.3	19	90	32	1400×1200	800×2100	Center	2150×1600	1500	4250
	1	P60-630/100	4.2	12	50	18						
* 630	1.5	P60-630/150	6.3	18	75	28	1100×1400	800×2100	Center	1850×1800	1500	4250
	1.75	P60-630/175	7.3	19	90	32						
* 630	1	P60-630/100	4.2	12	50	18	1100×1400	800×2100	Center	1850×1800	1500	4250
	1.5	P60-630/150	6.3	18	75	28						
	1.75	P60-630/175	7.3	19	90	32					1600	4400

Part with*: The motor is mounted on the rail, no opening hole on walls.



CONSTRUCTION LAYOUT AND SPECIFICATIONS

P80 LMR Passenger Elevator

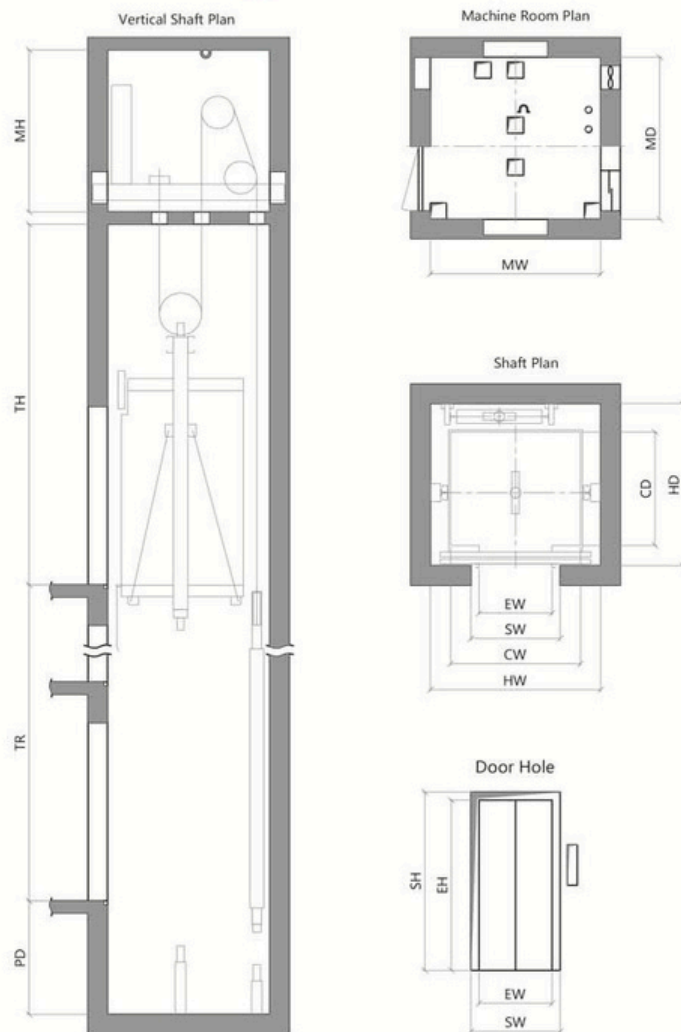


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Standard TH C142000
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
800	1	P80-800/100	5.3	15	50	18	1400×1350	800×2100	Center	2000×2050	1500	4650	
	1.5	P80-800/150	8	22	75	28						4700	
	1.75	P80-800/175	9.3	24	90	32						4800	
800	2	P80-800/200	10.7	26	100	36	1400×1350	800×2100	Center	2000×2150	2000	5100	
	2.5	P80-800/250	13.5	33	125	42						5200	
1000	1	P80-1000/100	6.5	18	50	18	1600×1400	900×2100	Center	2200×2100	1500	4650	
	1.5	P80-1000/150	9.8	26	75	28						4700	
	1.75	P80-1000/175	11.4	28	90	32						4800	
1000	2	P80-1000/200	12.4	31	100	36	1600×1400	900×2100	Center	2200×2200	2000	5100	
	2.5	P80-1000/250	15.5	37	125	42						5200	
1150	1	P80-1150/100	7.6	20	50	18	1800×1400	1000×2100	Center	2400×2100	1500	4650	
	1.5	P80-1150/150	11.4	29	75	28						4700	
	1.75	P80-1150/175	13.5	34	90	32						4800	
1150	2	P80-1150/200	14.2	35	100	36	1800×1400	1000×2100	Center	2400×2200	2000	5100	
	2.5	P80-1150/250	17.7	42	125	42						5200	
1250	1	P80-1250/100	8.2	21	50	18	1900×1500	1100×2100	Center	2500×2200	1500	4650	
	1.5	P80-1250/150	12.2	32	75	28						4700	
	1.75	P80-1250/175	14.3	35	90	32						4800	
1250	2	P80-1250/200	16.4	40	100	36	1900×1500	1100×2100	Center	2500×2300	2000	5100	
	2.5	P80-1250/250	20.4	48	125	42						5200	
1350	1	P80-1350/100	8.9	22	50	18	1900×1600	1100×2100	Center	2500×2300	1500	4650	
	1.5	P80-1350/150	13.2	35	75	28						4700	
	1.75	P80-1350/175	15.5	37	90	32						4800	
1350	2	P80-1350/200	17.7	42	100	36	1900×1600	1100×2100	Center	2500×2400	2000	5100	
	2.5	P80-1350/250	22.1	51	125	42						5200	
1600	1	P80-1600/100	10.5	26	50	18	2000×1700	1100×2100	Center	2600×2400	1500	4650	
	1.5	P80-1600/150	15.7	41	75	28						4700	
	1.75	P80-1600/175	18.4	44	90	32						4800	
1600	2	P80-1600/200	21	50	100	36	2000×1700	1100×2100	Center	2600×2500	2000	5100	
	2.5	P80-1600/250	26.2	61	125	42						5200	
2000	1	P80-2000/100	13	37	50	18	2000×2000	1100×2100	Center	2600×2700	1500	4650	
	1.5	P80-2000/150	20.7	55	75	28						4700	
	1.75	P80-2000/175	22.6	59	90	32						4800	
2000	2	P80-2000/200	27.5	66	100	36	2000×1700	1100×2100	Center	2600×2800	2000	5100	
	2.5	P80-2000/250	34.5	83	125	42						5200	
1600	1	P80-1600/100	10.5	26	50	18	1400×2400	1200×2100	Side	2400×2900	1500	4650	
	1.5	P80-1600/150	15.7	41	75	28						4700	
	1.75	P80-1600/175	18.4	44	90	32						4800	
1600	2	P80-1600/200	21	50	100	36	1400×2400	1200×2100	Center	2700×2800	1500	4650	
	1.5	P80-1600/150	15.7	41	75	28						4700	
	1.75	P80-1600/175	18.4	44	90	32						4800	
1600	1	P80-1600/100	10.5	26	50	18	1400×2400	1200×2100	2-Side	2400×3050	1500	4650	
	1.5	P80-1600/150	15.7	41	75	28						4700	
	1.75	P80-1600/175	18.4	44	90	32						4800	


113*
*114

CONSTRUCTION LAYOUT AND SPECIFICATIONS

P90 HMT Passenger Elevator

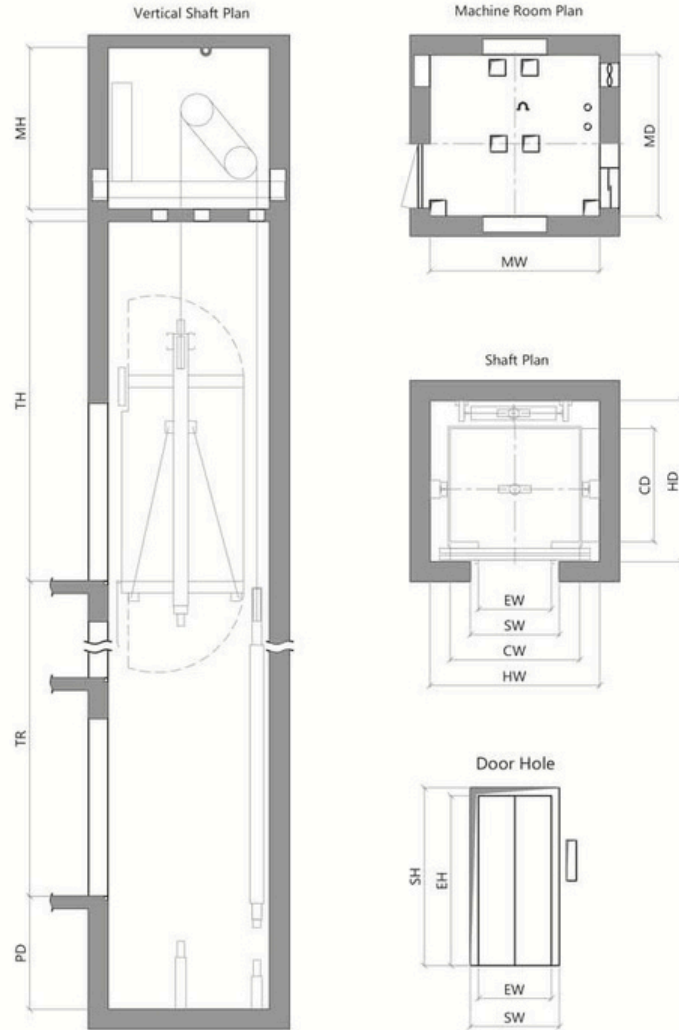


Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standart Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)
1000	3	P90-1000/300	20.5	48	150	39	1600×1400	900×2100	One Door	2300×2250	3900	5500
	3.5	P90-1000/350	23.9	56	175	46						5500
	4	P90-1000/400	27.3	62	200	52						5500
1150	3	P90-1150/300	25.5	58	150	39	1800×1400	1000×2100	One Door	2500×2250	3900	5500
	3.5	P90-1150/350	27.8	68	175	46						5500
	4	P90-1150/400	34	77	200	52						5500
1250	3	P90-1250/300	25.5	58	150	39	1900×1500	1100×2100	One Door	2600×2350	3900	5500
	3.5	P90-1250/350	30	68	175	46						5500
	4	P90-1250/400	34	77	200	52						5500
1350	3	P90-1350/300	27.7	62	150	39	1900×1600	1100×2100	One Door	2600×2450	3900	5500
	3.5	P90-1350/350	32.2	72	175	46						5500
	4	P90-1350/400	36.9	81	200	52						5500
1600	3	P90-1600/300	34.2	75	150	39	2000×1700	1100×2100	One Door	2700×2550	3900	5500
	3.5	P90-1600/350	39.5	87	175	46						5500
	4	P90-1600/400	45.3	98	200	52						5500
2000	3	P90-2000/300	41.5	95	150	39	2000×2000	1100×2100	One Door	2700×2850	3900	5500
	3.5	P90-2000/350	48.4	110	175	46						5500
	4	P90-2000/400	55.3	125	200	52						5500
2000	8	P90-2000/800	105	260	400	100	2050×1950	1100×2100	One Door	2800×3150	6000	10000

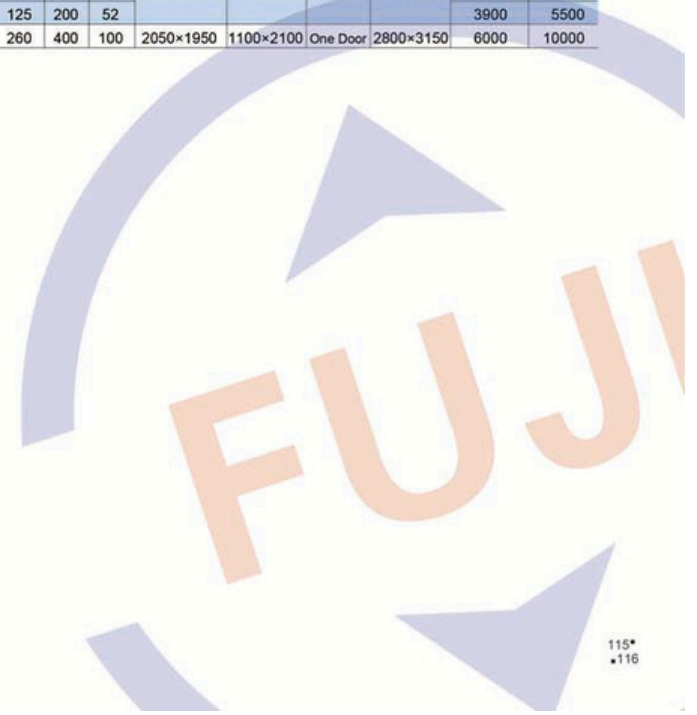

115*
•116

CONSTRUCTION LAYOUT AND SPECIFICATIONS


H10 Home Elevator

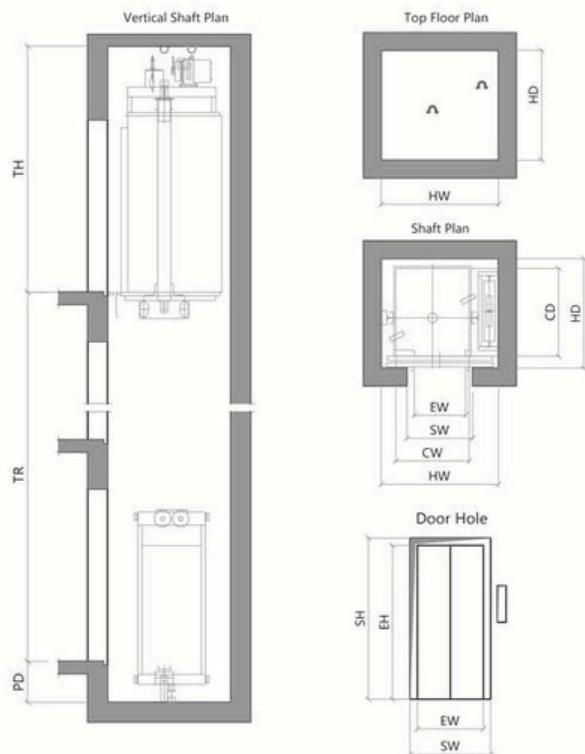

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
320	0.4	H10-320/040	0.85	7	12	5	900×1200	800×2000	Side	1500×1550	500	3100	
400	0.4	H10-400/040	1.1	8	12	5	1000×1200	700×2000	Center	1600×1500	500	3100	
200	0.4	H10-200/040	0.85	7	12	5	750×900	700×2000	Side	1300×1200	500	3100	Steel Shaft
320	0.4	H10-320/040	0.85	7	12	5	900×1200	800×2000	Side	1500×1500	500	3100	Steel Shaft
400	0.4	H10-400/040	1.1	8	12	5	1000×1200	700×2000	Center	1600×1450	500	3100	Steel Shaft
200	0.3	H10-200/030	0.85	7	12	5	750×900	600×2000	Hand	1150×1050	500	3100	Steel Shaft
400	0.4	H10-400/040	1.1	8	12	5	1000×1200	700×2000	Center	1600×1500	250	3300	top Wheel

CONSTRUCTION LAYOUT AND SPECIFICATIONS


H20 Home Elevator

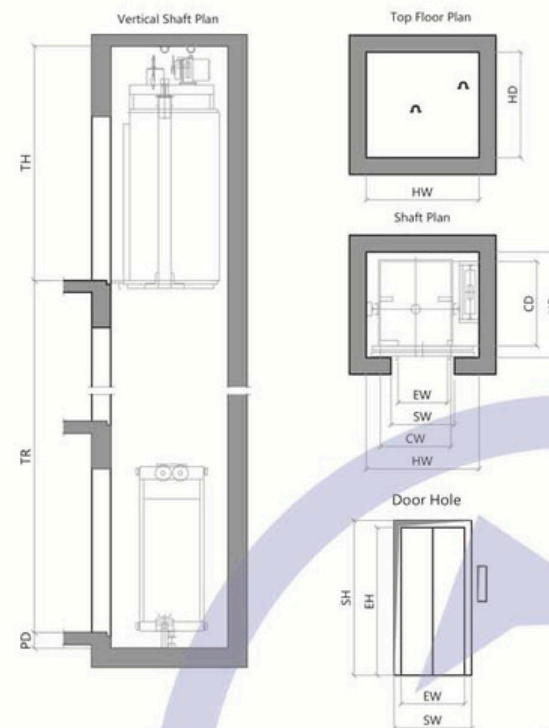

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
200	0.4	H20-200/040	0.85	7	12	5	650×800	600×2000	Side	1150×1100	300	3200	
320	0.4	H20-320/040	0.85	7	12	5	900×1200	800×2000	Side	1450×1550	300	3200	
400	0.4	H20-400/040	1.1	8	12	5	1000×1200	800×2000	Side	1550×1550	300	3200	
200	0.4	H20-200/040	0.85	7	12	5	650×800	600×2000	Side	1150×1100	300	3200	Steel Shaft
320	0.4	H20-320/040	0.85	7	12	5	900×1200	800×2000	Side	1450×1550	300	3200	Steel Shaft
400	0.4	H20-400/040	1.1	8	12	5	1000×1200	800×2000	Side	1550×1550	300	3200	Steel Shaft
200	0.3	H20-200/030	0.85	7	12	5	600×850	600×2000	Hand	1100×950	300	3200	Steel Shaft
400	0.4	H20-400/040	1.1	8	12	5	1000×1200	700×2000	Center	1550×1450	300	3200	Steel Shaft

CONSTRUCTION LAYOUT AND SPECIFICATIONS


H21 SH Home Elevator

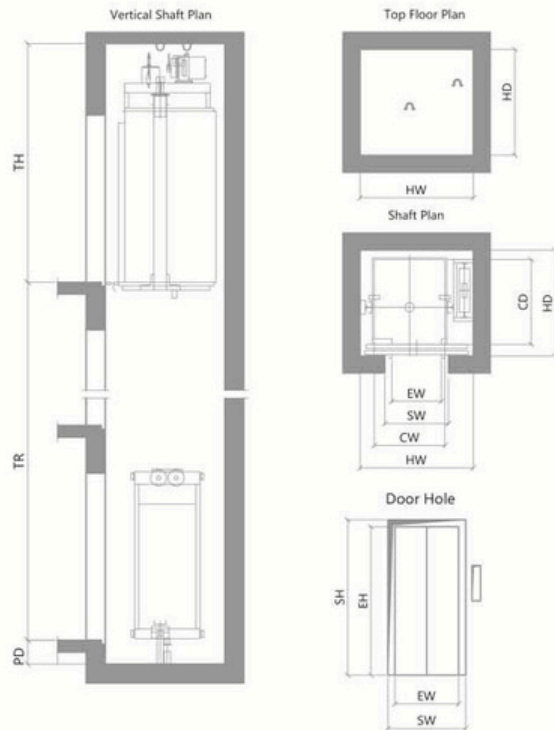

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
200	0.4	H21-200/040	0.85	7	12	5	650×800	600×2000	Side	1200×1150	400	2900	
320	0.4	H21-320/040	0.85	7	12	5	900×1200	800×2000	Side	1450×1550	400	2900	
400	0.4	H21-400/040	1.1	8	12	5	1000×1200	800×2000	Side	1550×1550	400	2900	
200	0.4	H21-200/040	0.85	7	12	5	650×800	600×2000	Side	1200×1150	400	2900	Steel Shaft
320	0.4	H21-320/040	0.85	7	12	5	900×1200	800×2000	Side	1450×1550	400	2900	Steel Shaft
400	0.4	H21-400/040	1.1	8	12	5	1000×1200	800×2000	Side	1550×1550	400	2900	Steel Shaft

CONSTRUCTION LAYOUT AND SPECIFICATIONS

H22 WR Home Elevator

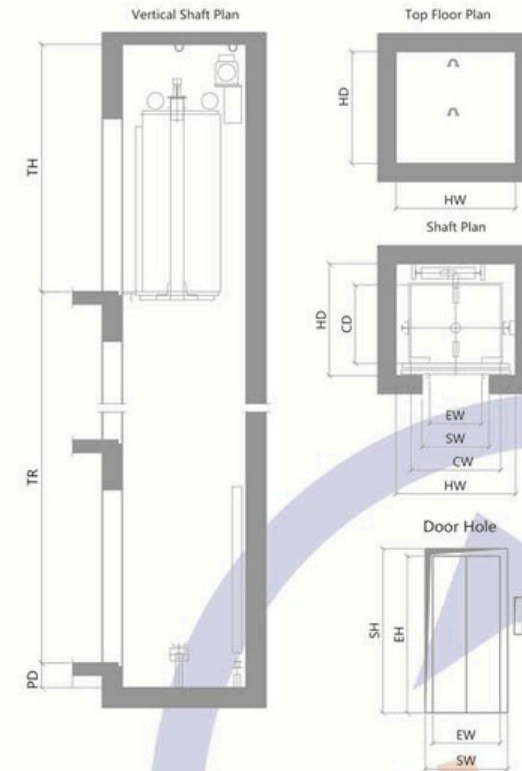


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
200	0.4	H22-200/040	0.85	7	12	5	900×800	700×2000	Side	1300×1350	300	3200	
320	0.4	H22-320/040	0.85	7	12	5	1150×950	700×2000	Center	1550×1400	300	3200	
400	0.4	H22-400/040	1.1	8	12	5	1200×1000	700×2000	Center	1600×1450	300	3200	
200	0.4	H22-200/040	0.85	7	12	5	900×800	700×2000	Side	1300×1350	300	3200	Steel Shaft
320	0.4	H22-320/040	0.85	7	12	5	1150×950	700×2000	Center	1550×1400	300	3200	Steel Shaft
400	0.4	H22-400/040	1.1	8	12	5	1200×1000	700×2000	Center	1600×1450	300	3200	Steel Shaft

119*
•120

CONSTRUCTION LAYOUT AND SPECIFICATIONS


H30 Home Elevator (alternative)

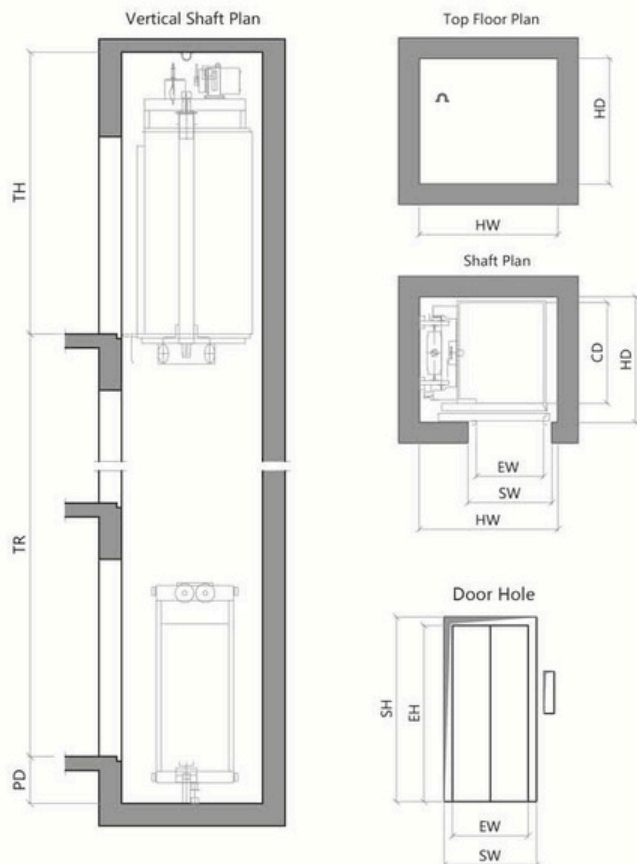

Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standart Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
400	0.4	H30-400/040	1.1	8	12	5	1000×1200	800×2000	One Door	Side	1650×1550	500	3400
400	0.4	H30-400/040	1.1	8	12	5	1000×1200	800×2000	One Door	Hand	1750×1350	500	3400

CONSTRUCTION LAYOUT AND SPECIFICATIONS

H50 PD Home Elevator

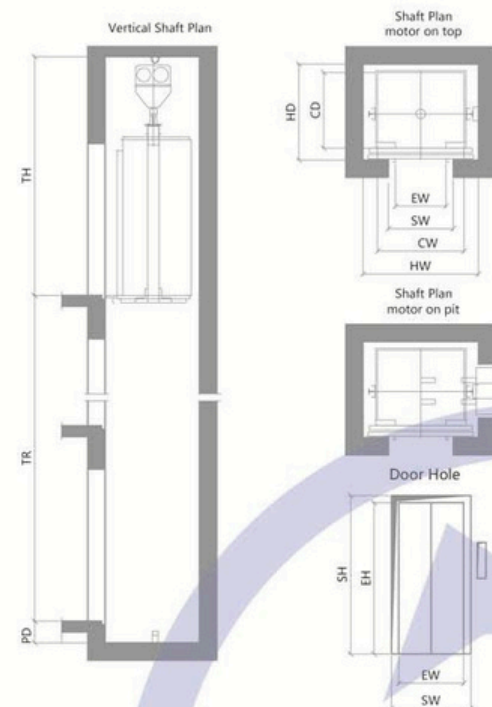


Capa city	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standart Pit	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	
200	0.3	H50-200/030	2.4	9	12	5	900×900	700×2000	Side	1300×1250	300	3500	Motor on top
320	0.3	H50-320/030	2.7	10	12	5	1000×1100	700×2000	Side	1400×1450	300	3500	Motor on top
400	0.3	H50-400/030	3	12	12	5	1150×1100	700×2000	Center	1550×1400	300	3500	Motor on top
200	0.3	H50-200/030	2.4	9	12	5	900×900	800×2000	Hand	1250×1000	300	3500	Motor on top
200	0.3	H50-200/030	2.4	9	12	5	900×900	700×2000	Side	1300×1250	300	3500	Steel Shaft
320	0.3	H50-320/030	2.7	10	12	5	1000×1100	700×2000	Side	1400×1450	300	3500	Steel Shaft
400	0.3	H50-400/030	3	12	12	5	1150×1100	700×2000	Center	1550×1400	300	3500	Steel Shaft
200	0.3	H50-200/030	2.4	9	12	5	900×900	800×2000	Hand	1250×1000	300	3500	Steel Shaft
400	0.3	H50-400/030	3	12	12	5	1150×1100	700×2000	Center	1550×1400	300	3200	Motor on bottom

121*
•122

CONSTRUCTION LAYOUT AND SPECIFICATIONS

H60 ST Home Elevator

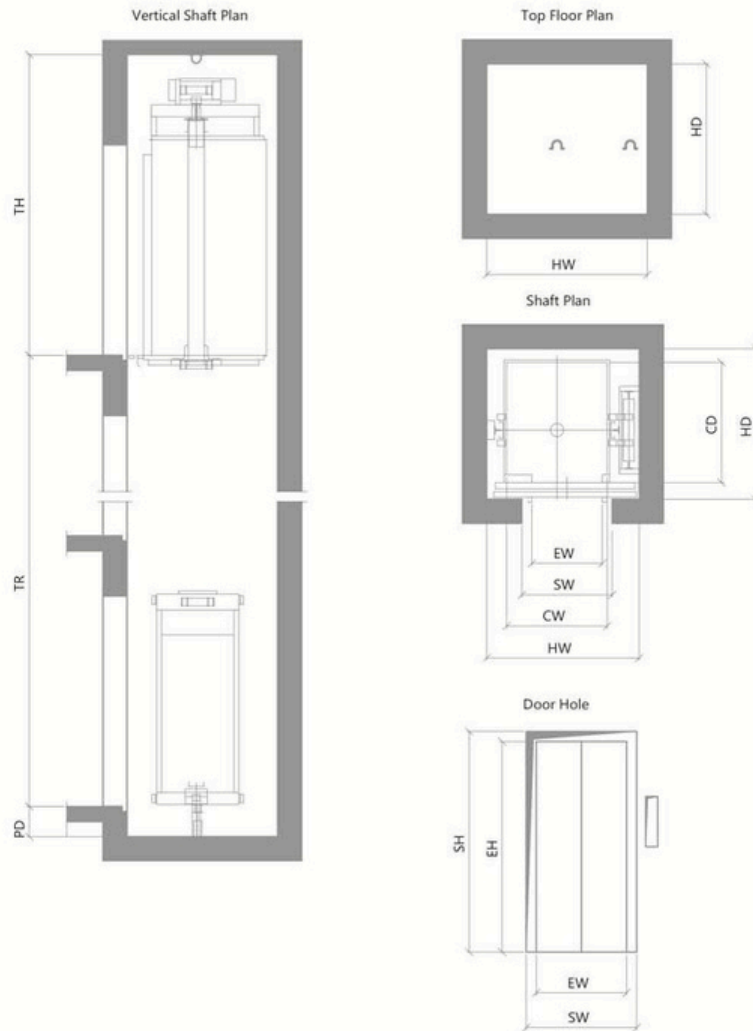


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Door Type	Standard Shaft Size	Standard Pit	Standard TH	Standard TH	Remark
kg	m/s		kW	A	m		CW × CD	EW × EH		HW × HD	PD(mm)	TH(mm)	TH(mm)	
200	0.4	H60-200/040	0.85	7	12	5	900×900	700×2000	Side	1400×1250	300	2900	Bottom wheel	
320	0.4	H60-320/040	0.85	7	12	5	900×1200	700×2000	Side	1400×1550	300	2900	Bottom wheel	
400	0.4	H60-400/040	1.1	8	12	5	1000×1200	800×2000	Side	1500×1550	300	2900	Bottom wheel	
200	0.4	H60-200/040	0.85	7	12	5	900×900	700×2000	Side	1400×1250	300	2900	Steel Shsft	
320	0.4	H60-320/040	0.85	7	12	5	900×1200	700×2000	Side	1400×1550	300	2900	Steel Shsft	
400	0.4	H60-400/040	1.1	8	12	5	1000×1200	800×2000	Side	1500×1550	300	2900	Steel Shsft	
200	0.4	H60-200/040	0.85	7	12	5	700×800	600×2000	Side	1100×1100	300	2900	Top wheel	



123*
•124

CONSTRUCTION LAYOUT AND SPECIFICATIONS

F10 MR Freight Elevator

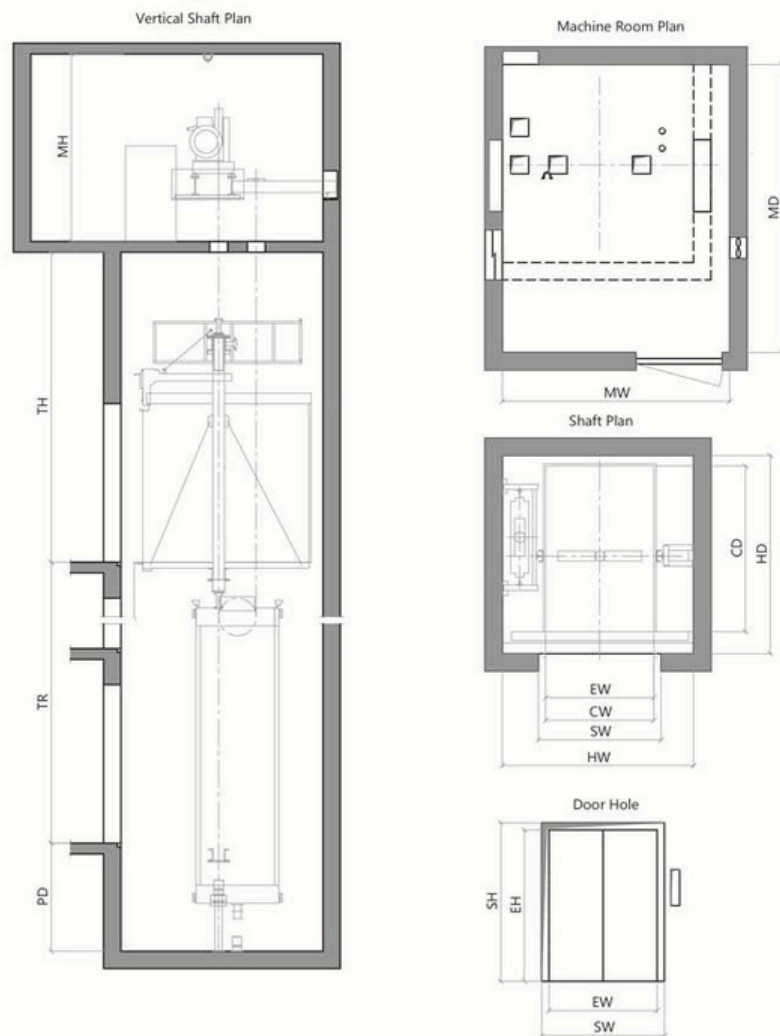


MOARK
ascensores

FUJI
MODERN FUJI

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
1000	0.5	F10-1000/050	7.5	21	30	10	1400×1700	1200×2100	One Door	Side	2550×2100	1500	4300
	1	F10-1000/100	11	26	50	16	1300×1800	1100×2100	Through Door	Side	2100×2350	1500	4300
1000	0.5	F10-1000/050	7.5	21	30	10	1500×2300	1500×2100	One Door	4-Center	2650×2750	1500	4300
	1	F10-1000/100	11	26	50	16	1500×2300	1500×2100	Through Door	4-Center	2650×2900	1500	4300
1600	0.5	F10-1600/050	7.5	19	30	10	1500×2300	1500×2100	One Door	4-Center	2650×2750	1500	4300
	1	F10-1600/100	22	47	30	10	1500×2300	1500×2100	Through Door	4-Center	2650×2900	1500	4300
2000	0.5	F10-2000/050	11	26	30	10	1700×2400	1700×2100	One Door	4-Center	2900×2900	1500	4300
	1	F10-2000/100	22	47	50	16	1700×2400	1700×2100	Through Door	4-Center	2900×3000	1500	4300
2500	0.5	F10-2500/050	15	35	30	10	2000×2500	2000×2100	One Door	4-Center	3350×3000	1500	4300
	1	F10-2500/100	26	56	50	16	2000×2500	2000×2100	Through Door	4-Center	3350×3100	1500	4300
3000	0.5	F10-3000/050	15	35	30	10	2000×2800	2000×2100	One Door	4-Center	3350×3300	1500	4300
	1	F10-3000/100	30	65	50	16	2000×2800	2000×2100	Through Door	4-Center	3350×3400	1500	4300
4000	0.25	F10-4000/025	11	26	15	5	2200×3300	2200×2100	One Door	4-Center	3800×3800	1500	4500
	0.5	F10-4000/050	18.5	42	30	10	2200×3300	2200×2100	One Door	4-Center	3800×3900	1500	4500
5000	0.25	F10-5000/025	15	35	15	5	2500×3500	2500×2100	One Door	4-Center	4150×4000	1600	4800
	0.5	F10-5000/050	22	47	30	10	2500×3500	2500×2100	Through Door	4-Center	4150×4100	1600	4800

CONSTRUCTION LAYOUT AND SPECIFICATIONS

F20 MRL Freight Elevator

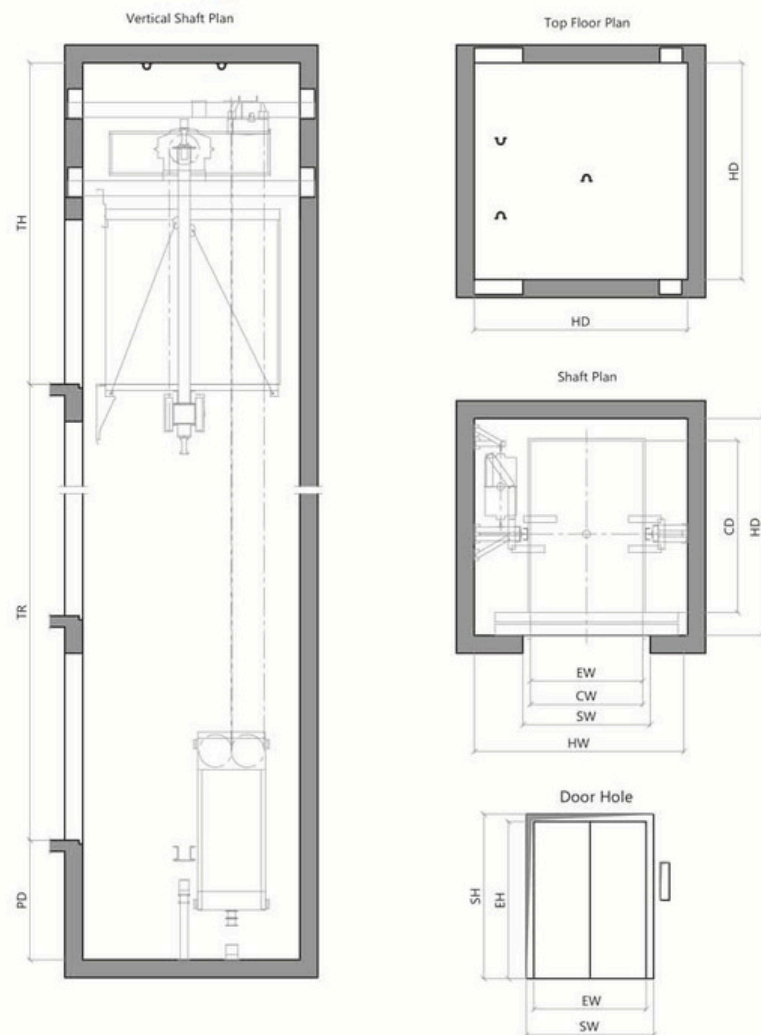


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
1000	1	F20-1000/100	6.5	18	50	16	1400×1700	1400×2100	One Door	4-Center	2500×2250	1600	4300
	1.5	F20-1000/150	9.8	26	75	25	1400×1700	1200×2100	Through Door	Side	2400×2250	1600	4600
1000	1	F20-1000/100	6.5	18	50	16	1400×1700	1200×2100	Through Door	Side	2400×2250	1600	4300
	1.5	F20-1000/150	9.8	26	75	25	1400×1700	1200×2100	Through Door	Side	2400×2250	1600	4600
1600	0.5	F20-1600/050	5.3	15	30	10	1500×2300	1500×2100	One Door	4-Center	2850×2900	1600	4300
	1	F20-1600/100	10.7	26	50	16	1500×2300	1500×2100	Through Door	4-Center	2850×2900	1600	4600
1600	0.5	F20-1600/050	5.3	15	30	10	1500×2300	1500×2100	Through Door	4-Center	2850×2900	1600	4300
	1	F20-1600/100	10.7	26	50	16	1500×2300	1500×2100	Through Door	4-Center	2850×2900	1600	4600
2000	0.5	F20-2000/050	6.5	18	30	10	1700×2400	1700×2100	One Door	4-Center	3050×3000	1600	4300
	1	F20-2000/100	13.1	33	50	16	1700×2400	1700×2100	Through Door	4-Center	3050×3000	1600	4600
2000	0.5	F20-2000/050	6.5	18	30	10	1600×2600	1600×2100	Through Door	4-Center	2950×3200	1600	4300
	1	F20-2000/100	13.1	33	50	16	1600×2600	1600×2100	Through Door	4-Center	2950×3200	1600	4600
2000	0.5	F20-2000/050	6.5	18	30	10	1500×2700	1500×2100	One Door	4-Center	2850×3250	1600	4300
	1	F20-2000/100	13.1	33	50	16	1500×2700	1500×2100	Through Door	4-Center	2850×3250	1600	4600
2000	0.5	F20-2000/050	6.5	18	30	10	1500×2700	1500×2100	Through Door	4-Center	2850×3300	1600	4300
	1	F20-2000/100	13.1	33	50	16	1500×2700	1500×2100	Through Door	4-Center	2850×3300	1600	4600
3000	0.5	F20-3000/050	10.5	32	30	10	2000×2800	2000×2100	One Door	4-Center	3500×3400	1600	4300
	1	F20-3000/100	20.7	55	50	18	2000×2800	2000×2100	Through Door	4-Center	3500×3400	1600	4300
3000	0.5	F20-3000/050	10.5	32	30	10	2000×2800	2000×2100	Through Door	4-Center	3500×3400	1600	4300
	1	F20-3000/100	20.7	55	50	18	2000×2800	2000×2100	Through Door	4-Center	3500×3400	1600	4300
4000	0.5	F20-4000/050	13	37	30	10	2200×3300	2200×2100	One Door	4-Center	3800×3900	1600	4800
	1	F20-4000/100	26.7	74	50	18	2200×3300	2200×2100	Through Door	4-Center	3800×3900	1600	4800
4000	0.5	F20-4000/050	13	37	30	10	2200×3300	2200×2100	Through Door	4-Center	3800×3900	1600	4800
	1	F20-4000/100	26.7	74	50	18	2200×3300	2200×2100	Through Door	4-Center	3800×3900	1600	4800



127*
128

CONSTRUCTION LAYOUT AND SPECIFICATIONS


F30 PMR Freight Elevator

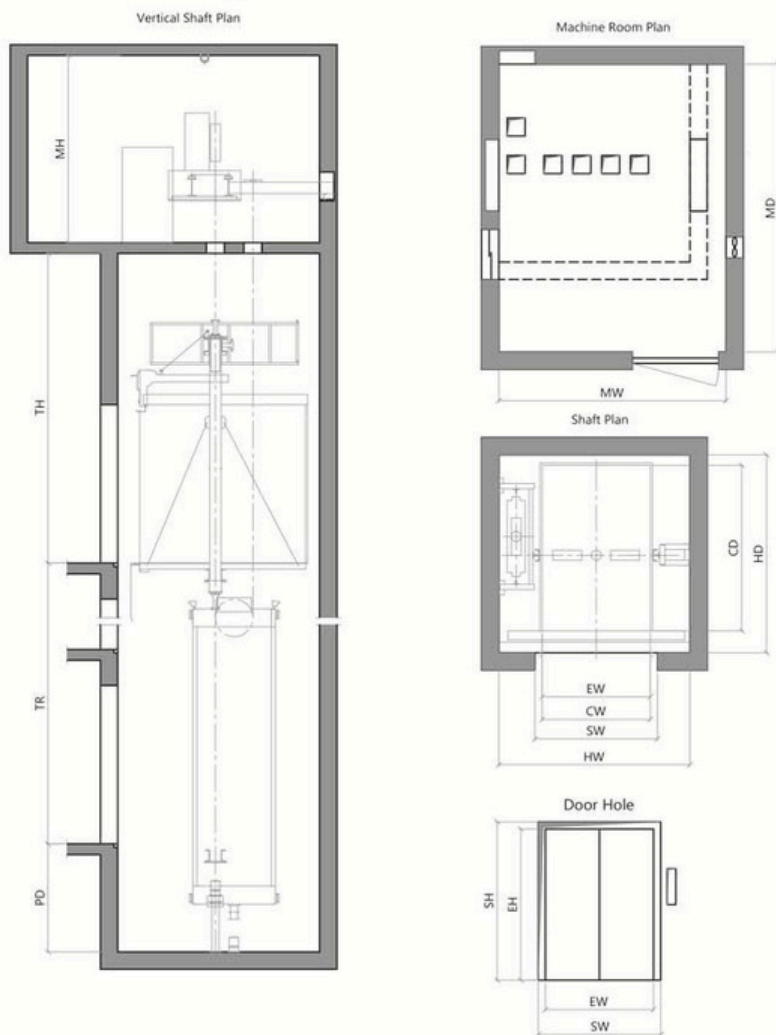

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
1600	0.5	F30-1600/050	5.4	11	30	10	1500×2300	1500×2100	One Door	4- Center	2650×2750	1500	4300
	1	F30-1600/100	8.1	17	50	16	1500×2300	1500×2100	Through Door	4- Center	2650×2900	1500	4300
2000	0.5	F30-2000/050	6.4	10	30	10	1700×2400	1700×2100	One Door	4- Center	2900×2900	1500	4300
	1	F30-2000/100	13.3	20	50	16	1700×2400	1700×2100	Through Door	4- Center	2900×3000	1500	4300
2500	0.5	F30-2500/050	8.3	13	30	10	2000×2500	2000×2100	One Door	4- Center	3350×3000	1500	4300
	1	F30-2500/100	17	26	30	10	2000×2500	2000×2100	Through Door	4- Center	3350×3100	1500	4300
3000	0.5	F30-3000/050	10.8	17	30	10	2000×2800	2000×2100	One Door	4- Center	3350×3300	1500	4300
	1	F30-3000/100	21.7	33	50	16	2000×2800	2000×2100	Through Door	4- Center	3350×3400	1500	4300
4000	0.5	F30-4000/050	13.3	20	30	10	2200×3300	2200×2100	One Door	4- Center	3800×3800	1500	4500
	1	F30-4000/100	26.6	40	50	16	2200×3300	2200×2100	Through Door	4- Center	3800×3900	1500	4500
5000	0.5	F30-5000/050	17	26	30	10	2500×3500	2500×2100	One Door	4- Center	4150×4000	1600	4800
	1	F30-5000/100	34	51	50	16	2500×3500	2500×2100	Through Door	4- Center	4150×4100	1600	4800
10000	0.5	F30-10000/050	34	51	30	10	3000×5500	2700×2300	Through Door	4- Center	4600×5500	1700	4900

CONSTRUCTION LAYOUT AND SPECIFICATIONS

F50 MR Car Elevator

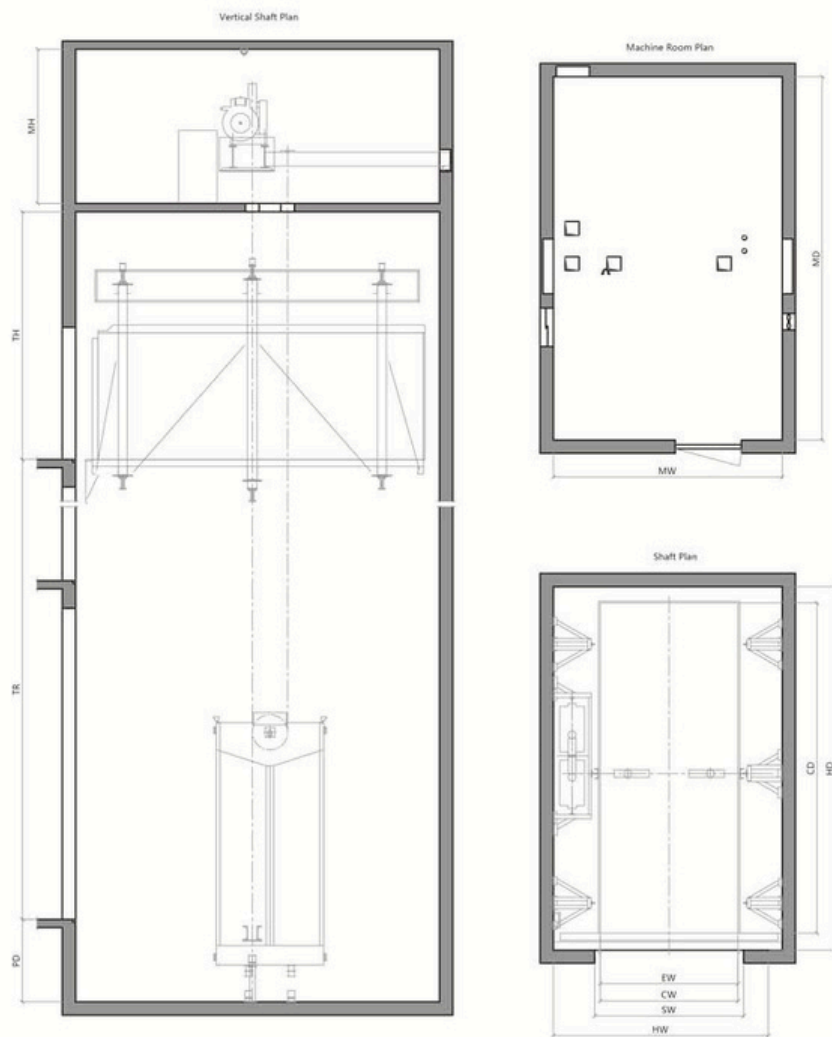


Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
3000	0.25	F50-3000/025	11	28	15	5	2500×6000	2500×2100	One Door	4-Center	4150×6600	1500	5000
	0.5	F50-3000/050	18.5	42	30	10	2500×6000	2500×2100	Through Door	4-Center	4150×6600	1500	5000
4000	0.25	F50-4000/025	15	22	15	5	3000×6500	2600×2100	One Door	4-Center	4500×7100	1500	5000
	0.5	F50-4000/050	35	49	30	10	3000×6500	2600×2100	Through Door	4-Center	4500×7100	1500	5000
5000	0.25	F50-5000/025	15	22	15	5	3500×7000	2700×2100	One Door	4-Center	4800×7600	1500	5000
	0.5	F50-5000/050	35	49	30	10	3500×7000	2700×2100	Through Door	4-Center	4800×7600	1500	5000



131*
•132

CONSTRUCTION LAYOUT AND SPECIFICATIONS


F60 MR Freight Elevator

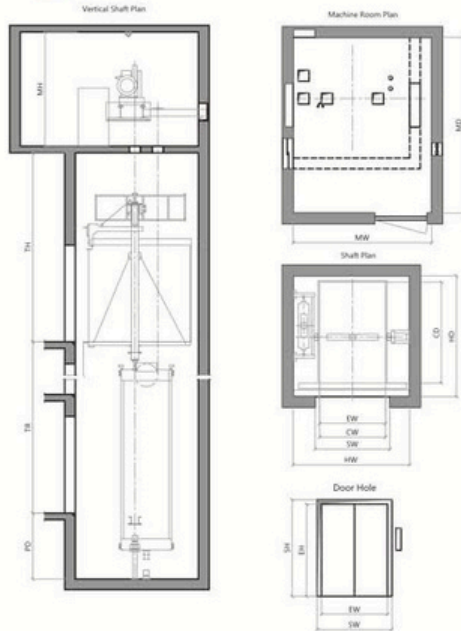

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
2000	0.5	F60-2000/050	11	26	30	10	1700×2400	1700×2100	One Door	4-Center	2900×2900	1500	4300
2000	0.5	F60-2000/050	11	26	30	10	1700×2400	1700×2100	Through Door	4-Center	2900×3000	1500	4300
2000	1	F60-2000/100	22	47	50	16	1700×2400	1700×2100	One Door	4-Center	2900×2900	1500	4300
2000	1	F60-2000/100	22	47	50	16	1700×2400	1700×2100	Through Door	4-Center	2900×3000	1500	4300
2500	0.5	F60-2500/050	15	35	30	10	2000×2500	2000×2100	One Door	4-Center	3350×3000	1500	4300
2500	0.5	F60-2500/050	15	35	30	10	2000×2500	2000×2100	Through Door	4-Center	3350×3100	1500	4300
2500	0.5	F60-2500/100	26	56	50	16	2000×2500	2000×2100	One Door	4-Center	3350×3000	1500	4300
2500	0.5	F60-3000/100	26	56	50	16	2000×2500	2000×2100	Through Door	4-Center	3350×3100	1500	4300
3000	0.5	F60-3000/050	15	35	30	10	2000×2800	2000×2100	One Door	4-Center	3350×3300	1500	4300
3000	0.5	F60-3000/050	15	35	30	10	2000×2800	2000×2100	Through Door	4-Center	3350×3400	1500	4300
3000	0.5	F60-3000/100	30	65	50	16	2000×2800	2000×2100	One Door	4-Center	3350×3300	1500	4300
3000	0.5	F60-3000/100	30	65	50	16	2000×2800	2000×2100	Through Door	4-Center	3350×3400	1500	4300



CONSTRUCTION LAYOUT AND SPECIFICATIONS

F70 MRL Freight Elevator

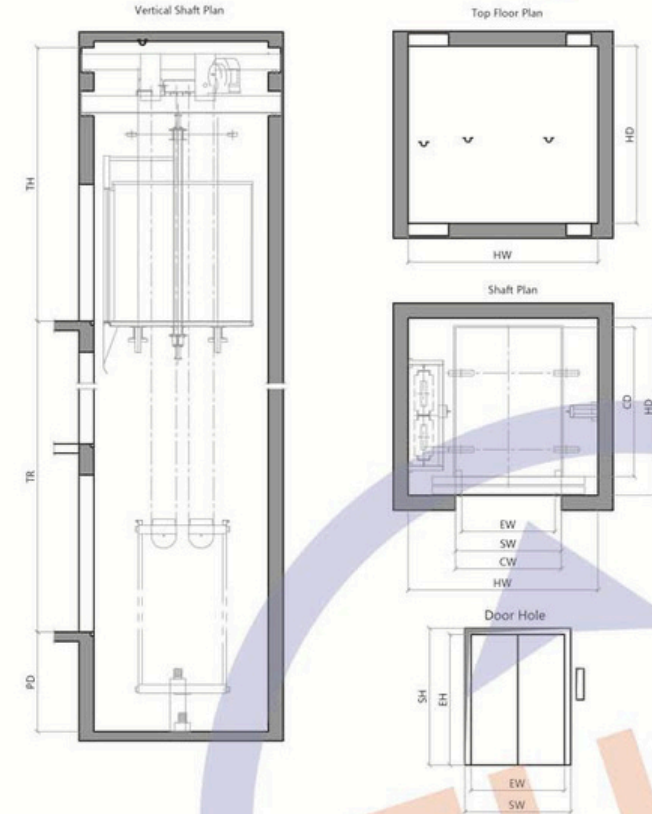

Capacity	Speed	Model	Rated Power	Rated Current	Max Rising Height	Max Stops	Car Size	Door Size	Car type	Door Type	Standard Shaft Size	Standard Pit	Standard TH
kg	m/s		kW	A	m		CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
2000	0.5	F70-2000/050	6.5	18	30	10	1700×2400	1700×2100	One Door	4-Center	3050×2850	1600	4500
2000	0.5	F70-2000/050	6.5	18	30	10	1700×2300	1700×2100	Through Door	4-Center	3050×2900	1600	4500
3000	0.5	F70-3000/050	10.5	32	30	10	2000×2800	2000×2100	One Door	4-Center	3350×3300	1600	4300
3000	0.5	F70-3000/050	10.5	32	30	10	2000×2800	2000×2100	Through Door	4-Center	3350×3400	1600	4300

Escalator Construction Layout Drawing

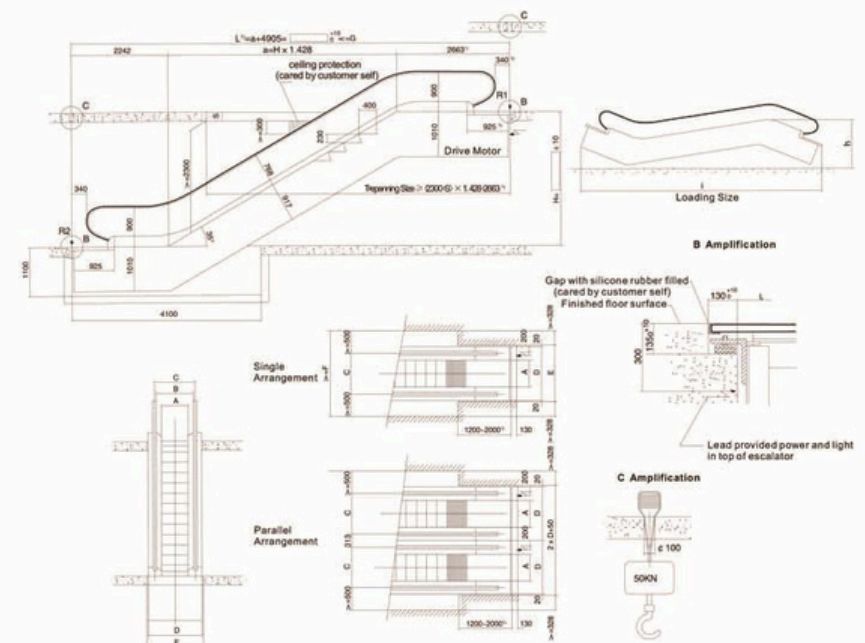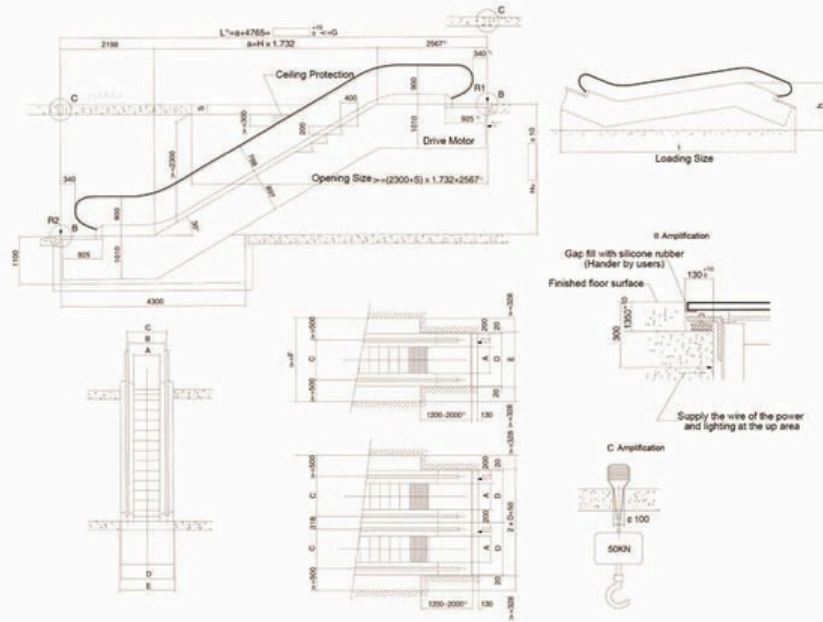

Model	Rise Height	Weight	Support Load		Power kw	Transport Dimension	
			R1	R2		H	I
MDFJ-E30-600K 4500 man/hour	H	KN	KN	KN	5.5	2172	11177
	3000	57	46	41		2217	12165
	3500	60	49	44		2254	13155
	4000	63	52	47	8	2284	14146
	4500	67	56	50		2309	15138
	5000	74	62	56		2330	16131
	6000	77	65	59		2348	17125
MDFJ-E30-800K 6750 man/hour	3000	59	52	47	5.5	2066	10788
	3500	63	56	50		2101	11778
	4000	67	60	54		2130	12769
	4500	70	64	57	8	2153	13762
	5000	74	68	60		2172	14755
	5500	78	74	66		2188	15750
	6000	81	78	69	11	2201	16745
MDFJ-E30-1000K 9000 man/hour	3000	63	59	53	5.5	2066	10788
	3500	67	64	57		2101	11778
	4000	71	68	61		2130	12769
	4500	75	73	65	8	2153	13762
	5000	79	79	71		2172	14755
	5500	83	84	75		2188	15750
	6000	86	88	79	11	2201	16745

	Cascade width		
	1000mm	800mm	600mm
A: Step width	1000	800	600
B: Between handrail belt width	1157	957	757
C: Handrail center distance	1237	1037	837
D: Escalator width	1540	1340	1140
E: Well width	1580	1380	1180
F: Minimum spacing	2236	2036	1836
G: Maximum spacing	16000	17200	18900

1. If L>G, Need to increase intermediate support
2. If step width is 600mm, upper truss need increase 417mm
3. Please consult the technical for detailed motor power parameters


Model	Rise Height	Weight	Support Load		Power kw	Transport Dimension	
			R1	R2		H	I
MDFJ-F35-600K 4500 man/hour	H	KN	KN	KN	5.5	2291	10458
	3000	54	43	39		2345	11309
	3500	57	46	41		2389	12163
	4000	60	49	44	8	2425	13019
	4500	64	52	46		2456	13877
	5000	67	54	49		2481	14737
	5500	70	57	51		2503	15598
MDFJ-F35-800K 6750 man/hour	3000	58	49	44	5.5	2177	10073
	3500	60	52	47		2219	10926
	4000	63	56	50		2253	11782
	4500	66	59	53	8	2281	12640
	5000	70	62	56		2304	13500
	5500	73	65	59		2324	14362
	6000	76	69	61	11	2340	15224
MDFJ-F35-1000K 9000 man/hour	3000	60	56	50	5.5	2177	10073
	3500	64	60	53		2219	10926
	4000	67	64	57		2253	11782
	4500	71	67	60	8	2281	12640
	5000	74	71	67		2304	13500
	5500	78	77	69		2324	14362
	6000	82	81	72	11	2340	15224

The unit is mm, the size of the individual may be modified.

	Cascade width		
	1000mm	800mm	600mm
A: Step width	1000	800	600
B: Between handrail belt width	1157	957	757
C: Handrail center distance	1237	1037	837
D: Escalator width	1540	1340	1140
E: Well width	1580	1380	1180
F: Minimum spacing	2236	2036	1836
G: Maximum spacing	16000	17200	18900

1. If L>G, Need to increase intermediate support
2. If step width is 600mm, upper truss need increase 417mm
3. Please consult the technical for detailed motor power parameters

Moving Walks Construction Layout Drawing

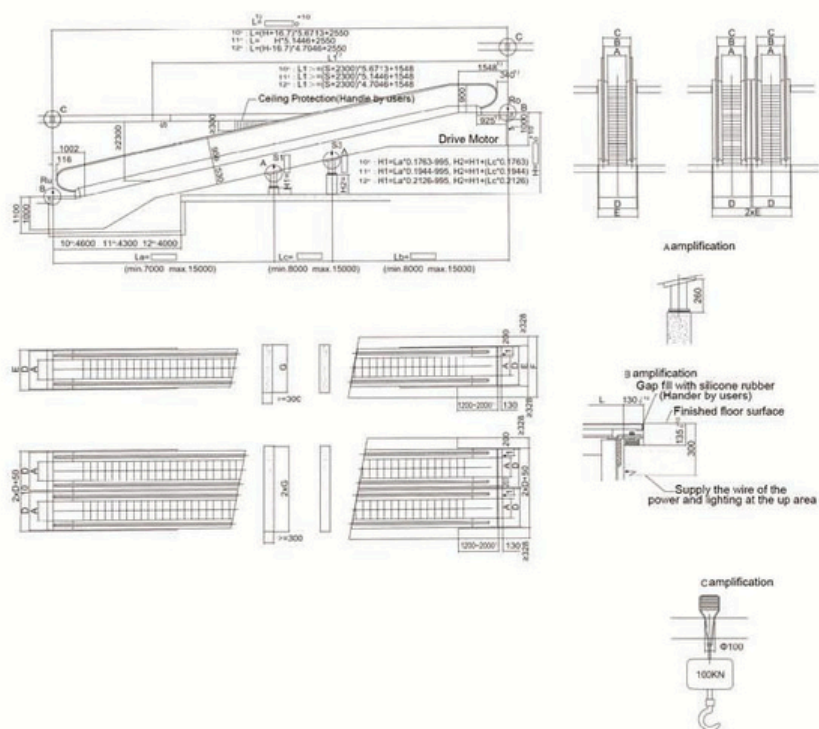

Model	Degree	Travelling Height		Center Support		La	Lb	Lc
		From	To	S1	S2			
MDFJ-M-0	0°	1273	2154	1	1	7000	L-7000	---
		2155	3388	1	1	L-15000	15000	---
		3389	4799	1	1	7000	15000	L-22000
MDFJ-M-10	10°	4800	6000	1	1	7000	15000	L-22000
		1423	2394	1	1	7000	L-7000	---
		2395	3754	1	1	L-15000	15000	---
MDFJ-M-11	11°	3755	5309	1	1	7000	15000	L-22000
		5310	6000	1	1	7000	15000	L-22000
		1572	2634	1	1	7000	L-7000	---
MDFJ-M-12	12°	2635	4122	1	1	L-15000	15000	---
		4123	5822	1	1	7000	15000	L-22000
		5823	6000	1	1	7000	15000	L-22000

TYPICAL PROJECT

